# Ameron<sup>™</sup> Tall Washington Pole

# Available in base plate and embedded styles

In 1910 the Commission of Fine Arts in Washington D.C. designed the classically fluted lighting standard on which our Washington pole is based. Our Tall Washington is made from prestressed spun-cast concrete and will retain its beauty for many years, even in severe weather conditions.

### **Features and Benefits**

- Prestressed steel and highest quality concrete are centrifugally cast for ultimate strength and durability.
- Natural stone and terrazzo aggregates maintain a like new appearance with virtually no maintenance.
- Conforms to applicable sections of ACI, AASHTO, ASTM, and IBC standards.
- Exclusive 10-year warranty

### **Colors and Finishes**

A wide range of standard, pre-formulated and custom colors are available. The concrete shafts are lightly blasted to expose the texture and color of the natural stone. See separate Aggregates and Finishes sheet for details. We offer Amershield™, a premium graffiti-resistant coating, as well as other durable sealers and protectants that further enhance colors, protect the concrete surface and aid in the removal of graffiti.

Durability with a classic touch.



For further information contact us at: 1.800.552.6376





Catalog Number	Pole Height "A"	Base O.D.	Anchor Bolt	Bolt Circle	Base Plate (Sq)	Ultimate G.L. Moment (ft. lbs.)	Pole Weight (lbs.)
VBWX07.5	24'-7"	24"	1" x 36" x 6"	20"-21"	18"	24,300	1,300
VBWX09.0	29'-6"	24"	1" x 36" x 6"	20"-21"	18"	28,200	1,400

## Embedded Style - Information


Catalog Number	Pole Height "A"	Base O.D.	Embedded Depth "B"	Overall Length "OL"	Ultimate G.l. Moment (ft. lbs.)	Pole Weight (lbs.)
VEWX07.5	24'-7"	24"	4'-11"	29'-6"	24,300	1,800
VEWX09.0	29'-6"	24"	4'-11"	34'-5"	28,200	1,900


**Specifications:** Use Centrecon Specifications

Colors and finishes: See Centrecon Color Selection guide

**Luminaire mounting:** See technical-mounting options section for more information

Anti-graffiti and sealer: Optional coatings available for added protection

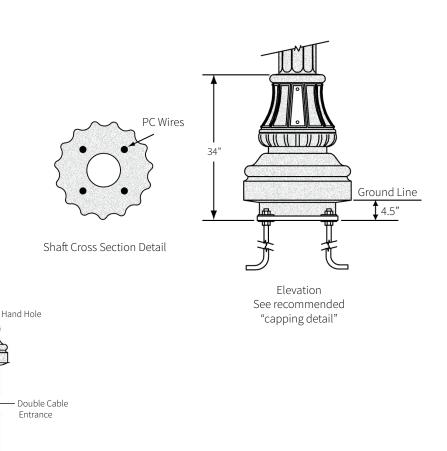



Base Plate

For further information contact us at: 1.800.552.6376



"B"

"A"

"OL"