

Pump			ROTOR				STATOR							Pump				
Metric	Imperial	Type	Drift Dia	Length		API Pin (Unless Noted)	Maximum OD		Length (Without Tag Bar)		Orbit Tube	Stator Discharge Thread	Stator Suction Thread	Tag Bar Suction Thread	Standard Tag Bar Length	Minimum Tubing Size. Threaded	Minimum Tubing Size Inserted	Options
				(a)	(b)		(c)	(d)	(e)	(f)								
			m3/day/100rpm m of lift	bpd/100 rpm ft of lift	mm (in)	m	in	mm (in)	mm (in)	m								
1-750	006-2500	2 7/8" Insert	31.8 mm (1.25")	1.14	44.75	15.9 mm (5/8")	73.9 mm (2.91")	1.02	40.0	+	60.3 mm NUE Pin (2.375" NUE Pin)	60.3 mm NUE Pin (2.375" NUE Pin)	60.3 mm EUE Pin (2.375" EUE Pin)	0.2 m (7.25")	60.3 mm (2 3/8")	114.3 mm (4 1/2")	30, NG	
1-1500	006-5000			2.15	84.75			2.03	80.0									
1-2250	006-7500			3.17	124.75			3.05	120.1									
1-3000	006-10000			4.18	164.75			4.07	160.1									
1-750	006-2500			1.14	44.75			1.75	69.1									
1-1500	006-5000			2.15	84.75			2.77	109.1									
1-2250	006-7500	3.17	124.75	3.79	149.2													
1-3000	006-10000	4.18	164.75	4.80	189.2	50.8 mm ACME Box (2" ACME Box)	42.2 mm EUE Box (1.66" EUE Box)	42.2 mm EUE Pin (1.66" EUE Pin)										
2-750	010-2500	2 7/8" Insert	31.8 mm (1.25")	1.14	44.75	15.9 mm (5/8")	73.9 mm (2.91")	1.02	40.0	+	60.3 mm NUE Pin	60.3 mm NUE Pin (2.375" NUE Pin)	60.3 mm EUE Pin (2.375" EUE Pin)	0.2 m (7.25")	60.3 mm (2 3/8")	114.3 mm (4 1/2")	30, NG	
2-1500	010-5000			2.15	84.75			2.03	80.0									
2-2250	010-7500			3.17	124.75			3.05	120.1									
2-750	010-2500			1.14	44.75			1.75	69.1									
2-1500	010-5000			2.15	84.75			2.77	109.1									
2-2250	010-7500			3.17	124.75			3.79	149.2									
3-600	015-2000	2 7/8" Insert	31.8 mm (1.25")	1.14	44.75	15.9 mm (5/8")	73.9 mm (2.91")	1.02	40.0	+	60.3 mm NUE Pin (2.375" NUE Pin)	60.3 mm NUE Pin (2.375" NUE Pin)	60.3 mm EUE Pin (2.375" EUE Pin)	0.2 m (7.25")	60.3 mm (2 3/8")	114.3 mm (4 1/2")	30, NG	
3-1200	015-4000			2.15	84.75			2.03	80.0									
3-1800	015-6000			3.17	124.75			3.05	120.1									
3-2400	015-8000			4.18	164.75			4.07	160.1									
3-3000	015-10000			5.21	205.00			5.08	200.2									
3-600	015-2000			1.14	44.75			1.75	69.1									
3-1200	015-4000	2.15	84.75	2.77	109.1													
3-1800	015-6000	3.17	124.75	3.79	149.2													
3-2400	015-8000	4.18	164.75	4.80	189.2													
3-3000	015-10000	5.21	205.00	5.82	229.2	50.8 mm ACME Box (2" ACME Box)	42.2 mm EUE Box (1.66" EUE Box)	42.2 mm EUE Pin (1.66" EUE Pin)										
4-750	025-2500	Slim Hole	38.1 mm (1.5")	1.54	60.75	19.1 mm (3/4")	78.2 mm (3.08")	1.40	55.0	+	60.3 mm EUE Pin (2.375" EUE Pin)	60.3 mm EUE Pin (2.375" EUE Pin)	60.3 mm EUE Pin (2.375" EUE Pin)	0.2 m (7.25")	60.3 mm (2 3/8")	114.3 mm (4 1/2")	30, NG	
4-1200	025-4000			2.20	86.75			2.06	81.0									
4-1500	025-5000			2.94	115.75			2.79	110.0									
4-1950	025-6500			3.61	142.00			3.46	136.1									
4-2400	025-8000			4.26	167.75			4.12	162.1									
4-3000	025-10000			5.73	225.75			5.59	220.1									
4-750	025-2500			1.54	60.8			1.55	61.0									
4-1200	025-4000			2.20	86.8			2.21	87.0									
4-1500	025-5000			2.94	115.8			2.95	116.0									
4-1950	025-6500			3.61	142.0			3.61	142.1									
4-2400	025-8000			4.26	167.8			4.27	168.1									
4-3000	025-10000			5.73	225.8			5.74	226.1									
6-350	044-1150	2 7/8" Insert	31.8 mm (1.25")	1.36	53.50	15.9 mm (5/8")	57.2 mm (2.25")	1.98	78.1	+	50.8 mm ACME Box (2" ACME Box)	42.2 mm EUE Box (1.66" EUE Box)	42.2 mm EUE Pin (1.66" EUE Pin)	0.2 m (7.25")	N/A	73 mm (2 7/8")		
6-700	044-2300			2.60	102.50			3.23	127.2									
6-1050	044-3500			3.85	151.50			4.48	176.2									
6-1400	044-4590			5.10	200.75			5.72	225.3									
6-1750	044-5750			6.34	249.75			6.97	274.4									
6-2100	044-6900			7.59	298.75			8.22	323.5									
6-2450	044-8050	8.84	348.00	9.46	372.6													
7-750	045-2500	Slim Hole	41.3 mm (1.625")	2.22	87.50	22.2 mm (7/8")	78.2 mm (3.08")	2.07	81.5	++	60.3 mm EUE Pin (2.375" EUE Pin)	60.3 mm EUE Pin (2.375" EUE Pin)	60.3 mm EUE Pin (2.375" EUE Pin)	0.2 m (7.25")	60.3 mm (2 3/8")	114.3 mm (4 1/2")	30, NG (2 7/8" EUE Pup Joint Required for NG)	
7-1200	045-4000			3.43	135.00			3.28	129.0									
7-1500	045-5000			4.24	167.00			4.09	161.0									
7-1800	045-6000			5.07	199.50			4.92	193.6									
7-2400	045-8000			6.71	264.00			6.56	258.1									
7-3000	045-10000			8.33	328.00			8.18	322.1									
7-750	045-2500			2.22	87.5			3.44	135.5									
7-1200	045-4000			3.43	135.0			4.65	183.0									
7-1500	045-5000			4.24	167.0			5.46	215.0									
7-1800	045-6000			5.07	199.5			6.29	247.6									
7-2400	045-8000			6.71	264.0			7.93	312.1									
7-3000	045-10000			8.33	328.0			9.55	376.1									
8-1500	056-5000		53.2 mm (2.095")	2.36	92.75	22.2 mm (7/8")	114.3 mm (4.5")	2.01	79.0		88.9 mm EUE Pin 3.5" EUE Pin	88.9 mm EUE Pin 3.5" EUE Pin	88.9 mm EUE Pin 3.5" EUE Pin	0.9 m (36")	73 mm (2 7/8")	139.7 mm (5 1/2")	20, NG	
8-2250	056-7500			3.36	132.25			3.01	118.6									

Pump			ROTOR					STATOR						Pump					
Metric	Imperial	Type	Drift Dia	Length		API Pin (Unless Noted)	Maximum OD		Length (Without Tag Bar)		Orbit Tube	Stator Discharge Thread	Stator Suction Thread	Tag Bar Suction Thread	Standard Tag Bar Length	Minimum Tubing Size. Threaded	Minimum Tubing Size Inserted	Options	
m3/day/100rpm m of lift	bpd/100 rpm ft of lift		(a)	(b)		(c)	Tube (d)	Collar (e)	(f)			(g)	(h)	(i)	(k)				
			mm (in)	m	in	mm (in)	mm (in)		m	in		mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	
9-400	060-1325	3 1/2" Insert	31.8 mm (1.25")	1.92	75.75	15.9 mm (5/8")	69.9 mm (2.75")		1.96	77.2	+	60.3 mm NUE Box (2.375" NUE Box)	60.3 mm NUE Box (2.375" NUE Box)	60.3 mm NUE Pin (2.375" NUE Pin)	0.2 m (7.25")	60.3 mm (2 3/8")	88.9 mm (3 1/2")		
9-800	060-2650			3.70	145.75				3.74	147.2									
9-1200	060-4000			5.49	216.00				5.52	217.3									
9-1600	060-5300			7.26	286.00				7.30	287.4									
9-2000	060-6700			9.02	355.00				9.04	379.4									
9-400	060-1325	Slim Hole 2 7/8" Insert	31.8 mm (1.25")	1.92	75.75	15.9 mm (5/8")	57.2 mm (2.25")		2.52	99.1	+	50.8 mm ACME Box (2" ACME Box)	42.2 mm EUE Box (1.66" EUE Box)	42.2 mm EUE Pin (1.66" EUE Pin)	0.2 m (7.25")	60.3 mm (2 3/8")	73 mm (2 7/8")		
9-800	060-2650			3.70	145.75				4.30	169.2									
9-1200	060-4000			5.49	216.00				6.08	239.2									
9-1600	060-5300			7.26	286.00				7.86	309.3									
9-2000	060-6700			9.02	355.00				9.08	357.5									
10-750	065-2500	Slim Hole	48.4 mm (1.904")	2.04	80.50	22.2 mm (7/8")	108.0 mm (4.25")		1.69	66.5	+	88.9 mm NUE Pin (3.5" NUE Pin)	88.9 mm NUE Pin (3.5" NUE Pin)	73.0 mm EUE Pin (2.875" EUE Pin)	0.4 m (16")	73 mm (2 7/8")	139.7 mm (5 1/2")	20, NG	
10-1200	065-4000			2.95	116.00				2.59	102.0									
10-1500	065-5000			3.76	148.00				3.40	134.0									
10-1800	065-6000			4.25	167.25				3.89	153.2									
10-2400	065-8000			5.54	218.25				5.18	204.1									
10-3000	065-10000			7.17	282.25				6.81	268.1									
10-3750	065-12500			8.86	348.75				8.50	334.7									
10-750	065-2500			2.04	80.50				1.87	73.5									
10-1200	065-4000			2.95	116.00				2.77	109.0									
10-1500	065-5000			3.76	148.00				3.58	141.0									
10-1800	065-6000			4.25	167.25				4.07	160.1									
10-2400	065-8000			5.54	218.25				5.36	211.1									
10-3000	065-10000			7.17	282.25				6.99	275.1									
10-3750	065-12500			8.86	348.75				8.68	341.7									
11-1200	067-4000			Slim Hole	53.2 mm (2.095")				2.27	89.25									25.4 mm (1")
11-1800	067-6000	3.23	127.25			2.87	113.0												
15-700	090-2300	Slim Hole	48.4 mm (1.907")	2.65	104.25	22.2 mm (7/8")	108.0 mm (4.25")		2.29	90.0	+	88.9 mm NUE Pin (3.5" NUE Pin)	88.9 mm NUE Pin (3.5" NUE Pin)	73.0 mm EUE Pin (2.875" EUE Pin)	0.4 m (16")	73 mm (2 7/8")	139.7 mm (5 1/2")	20, NG	
15-1410	090-4600			4.93	194.25				4.57	180.0									
15-1800	090-6000			6.08	239.25				5.72	225.1									
15-2100	090-6900			7.22	284.25				6.86	270.1									
15-2800	090-9000			9.51	374.25				9.15	360.1									
15-700	090-2300			2.65	104.25				2.46	97.0									
15-1410	090-4600			4.93	194.25				4.75	187.0									
15-1800	090-6000			6.08	239.25				5.89	232.1									
15-2100	090-6900			7.22	284.25				7.04	277.1									
15-2800	090-9000			9.51	374.25				9.32	367.1									
17-750	095-2500			2.72	107.00				2.36	93.0									
17-1200	095-4000			3.91	154.00				3.56	140.0									
17-1500	095-5000			5.09	200.50				4.73	186.1									
17-1800	095-6000			5.70	224.25				5.34	210.1									
17-2400	095-8000			7.47	294.25				7.11	280.1									
17-3000	095-10000	9.25	364.25	8.89	350.2														
17-3600	095-12000	11.00	434.25	10.60	420.2														
17-750	095-2500	2.72	107.00	2.54	100.0														
17-1200	095-4000	3.91	154.00	3.73	147.0														
17-1500	095-5000	5.09	200.50	4.90	193.1														
17-1800	095-6000	5.70	224.25	5.51	217.1														
17-2400	095-8000	7.47	294.25	7.29	287.1														
17-3000	095-10000	9.25	364.25	9.07	357.2														
17-3600	095-12000	11.00	434.25	10.80	427.2														
20-200	125-660	2 7/8" Insert	31.8 mm (1.25")	1.89	74.50	15.9 mm (5/8")	57.2 mm (2.25")		2.51	99.0	+	50.8 mm ACME Box (2" ACME Box)	42.2 mm EUE Box (1.66" EUE Box)	42.2 mm EUE Pin (1.66" EUE Pin)	0.2 m (7.25")	N/A	73 mm (2 7/8")		
20-400	125-1300			3.67	144.50				4.29	169.1									
20-600	125-2000			5.45	214.50				6.07	239.2									
20-800	125-2600			7.23	284.50				7.85	309.2									
20-1000	125-3300			9.01	354.50				9.63	379.3									
20-1200	125-4000			10.70	424.50				11.40	449.4									
21-440	131-1450	3 1/2" Insert	41.3 mm (1.625")	2.64	104.00	22.2 mm (7/8")	69.9 mm (2.75")		3.86	152.1	++	60.3 mm NUE Box (2.375" NUE Box)	60.3 mm NUE Box (2.375" NUE Box)	60.3 mm NUE Pin (2.375" NUE Pin)	0.2 m (7.25")	N/A	88.9 mm (3 1/2")	NG	
21-660	131-2175			3.89	153.00				5.11	201.2									
21-880	131-2900			5.13	202.00				6.35	250.2									
21-1100	131-3600			6.38	251.00				7.60	299.2									
21-1320	131-4350			7.62	300.00				8.85	348.2									
21-1540	131-5100			8.87	349.25				10.00	397.3									
21-2200	131-7200			12.60	496.25				13.80	544.4									


Pump			ROTOR				STATOR							Pump					
Metric	Imperial	Type	Drift Dia	Length		API Pin (Unless Noted)	Maximum OD		Length (Without Tag Bar)		Orbit Tube	Stator Discharge Thread	Stator Suction Thread	Tag Bar Suction Thread	Standard Tag Bar Length	Minimum Tubing Size. Threaded	Minimum Tubing Size Inserted	Options	
m3/day/100rpm m of lift	bpd/100 rpm ft of lift		(a)	(b)		(c)	Tube (d)	Collar (e)	(f)			(g)	(h)	(i)	(k)				
			mm (in)	m	in	mm (in)	mm (in)	mm (in)	m	in		mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	
22-750	135-2500	2:3 Multi Lobe	41.3 mm (1.625")	1.93	76.00	22.2 mm (7/8")	69.9 mm (2.75")	78.2 mm (3.08")	1.78	70.0	++	60.3 mm EUE Pin (2.375" EUE Pin)	60.3 mm EUE Pin (2.375" EUE Pin)	60.3 mm EUE Pin (2.375" EUE Pin)	0.2 m (7.25")	60.3 mm (2 3/8")	114.3 mm (4 1/2")		
22-1500	135-5000			3.73	147.00				3.56	140.0									
22-2250	135-7500			5.49	216.00				5.34	210.1									
22-3000	135-10000			7.26	286.00				7.11	280.1									
22-750	135-2500			1.93	76.00				3.15	124.1									
22-1500	135-5000			3.73	147.00				4.93	194.1									
22-2250	135-7500	5.49	216.00	6.71	264.2														
22-3000	135-10000	7.26	286.00	8.49	334.2														
23-750	144-2500	Slim Hole	51.6 mm (2.03")	2.71	102.75	25.4 mm (1")	95.3 mm (3.75")	114.3 mm (4.5") ▶	2.25	88.5	++	88.9 mm EUE Pin (3.5" EUE Pin)	88.9 mm EUE Pin (3.5" EUE Pin)	88.9 mm EUE Pin (3.5" EUE Pin)	0.4 m (16")	73 mm (2 7/8")	139.7 mm (5 1/2")	20, NG	
23-1200	144-4000			3.59	141.50				3.23	127.0									
23-1500	144-5000			4.86	191.50				4.50	177.0									
23-1875	144-6250			5.99	235.75				5.62	221.3									
23-2400	144-8000			6.82	268.50				6.45	254.1									
23-3000	144-10000			9.36	368.50				8.99	354.1									
23-3600	144-12000			10.00	395.50				9.68	381.2									
23-750	144-2500			2.71	102.75				3.53	139.0									
23-1200	144-4000			3.59	141.50				4.51	177.5									
23-1500	144-5000			4.86	191.50				5.78	227.5									
23-1875	144-6250			5.99	235.75				6.90	271.8									
23-2400	144-8000			6.82	268.50				7.74	304.6									
23-3000	144-10000	9.36	368.50	10.20	404.6														
23-3600	144-12000	10.00	395.50	10.90	431.7														
24-600	150-2000	Slim Hole	45.5 mm (1.79")	2.95	116.00	22.2 mm (7/8")	88.9 mm (3.5")	108.0 mm (4.25")	2.59	102.0	++	88.9 mm NUE Pin (3.5" NUE Pin)	88.9 mm NUE Pin (3.5" NUE Pin)	73.0 mm EUE Pin (2.875" EUE Pin)	0.4 m (16")	60.3 mm (2 3/8")	139.7 mm (5 1/2")	20, NG	
24-900	150-3000			4.27	168.00				3.91	154.0									
24-1200	150-4000			5.61	221.00				5.26	207.1									
24-1500	150-5000			6.96	274.00				6.61	260.1									
24-1800	150-6000			8.31	327.00				7.95	313.1									
24-2100	150-7000			9.63	379.00				9.28	365.2									
24-2400	150-8000			10.90	432.00				10.60	418.2									
24-2700	150-9000			12.30	485.25				11.90	471.2									
24-600	150-2000			2.95	116.00				2.77	109.0									
24-900	150-3000			4.27	168.00				4.09	161.0									
24-1200	150-4000			5.62	221.25				5.44	214.1									
24-1500	150-5000			6.97	274.25				6.78	267.1									
24-1800	150-6000	8.31	327.25	8.13	320.1														
24-2100	150-7000	9.63	379.25	9.45	372.2														
24-2400	150-8000	10.90	432.25	10.80	425.2														
24-2700	150-9000	12.30	485.25	12.10	478.2														
27-800	170-2600	Slim Hole	56.6 mm (2.229")	2.67	105.00	25.4 mm (1")	95.3 mm (3.75")	114.3 mm (4.5") ▶	2.30	90.5	++	88.9 mm EUE Pin (3.5" EUE Pin)	88.9 mm EUE Pin (3.5" EUE Pin)	88.9 mm EUE Pin (3.5" EUE Pin)	0.4 m (16")	73 mm (2 7/8")	139.7 mm (5 1/2")	20, NG	
27-1200	170-4000			3.81	150.00				3.44	135.5									
27-1600	170-5300			4.97	195.50				4.60	181.0									
27-2000	170-6700			6.12	240.75				5.74	226.1									
27-2400	170-8000			7.26	285.75				6.89	271.1									
27-3200	170-10500			9.57	376.75				9.20	362.1									
27-4000	170-13400			11.80	467.25				11.50	452.7									
27-800	170-2600			2.67	105.00				3.58	141.0									
27-1200	170-4000			3.81	150.00				4.72	186.0									
27-1600	170-5300			4.97	195.50				5.88	231.5									
27-2000	170-6700			6.12	240.75				7.03	276.6									
27-2400	170-8000			7.26	285.75				8.17	321.6									
27-3200	170-10500	9.57	376.75	10.40	412.6														
27-4000	170-13400	11.80	467.25	12.70	503.2														
32-600	200-2000	Slim Hole	57.7 mm (2.272")	3.10	122.00	25.4 mm (1")	95.3 mm (3.75")	114.3 mm (4.5") ▶	2.73	107.5	++	88.9 mm EUE Pin (3.5" EUE Pin)	88.9 mm EUE Pin (3.5" EUE Pin)	88.9 mm EUE Pin (3.5" EUE Pin)	0.4 m (16")	73 mm (2 7/8")	139.7 mm (5 1/2")	20, NG	
32-900	200-3000			4.48	176.50				4.10	161.3									
32-1200	200-4000			5.84	229.75				5.46	215.1									
32-1500	200-5000			7.20	283.50				6.83	268.8									
32-1800	200-6000			8.58	337.75				8.19	322.6									
32-2100	200-7000			9.93	391.00				9.56	376.4									
32-600	200-2000			3.10	122.00				4.01	158.0									
32-900	200-3000			4.48	176.50				5.38	211.8									
32-1200	200-4000			5.84	229.75				6.75	265.6									
32-1500	200-5000			7.20	283.50				8.11	319.3									
32-1800	200-6000			8.58	337.75				9.48	373.1									
32-2100	200-7000			9.93	391.00				10.80	426.9									

Pump			ROTOR				STATOR							Pump																	
Metric	Imperial	Type	Drift Dia (a)	Length (b)		API Pin (Unless Noted) (c)	Maximum OD (d) (e)		Length (Without Tag Bar) (f)		Orbit Tube	Stator Discharge Thread (g)	Stator Suction Thread (h)	Tag Bar Suction Thread (i)	Standard Tag Bar Length (k)	Minimum Tubing Size. Threaded (l)	Minimum Tubing Size Inserted (m)	Options													
				mm (in)	m		in	mm (in)	mm (in)	m									in	mm (in)	mm (in)	mm (in)									
m ³ /day/100rpm m of lift	bpd/100 rpm ft of lift																														
33-750	205-2500	Slim Hole	48.1 mm (1.893")	4.78	188.00	22.2 mm (7/8")	88.9 mm (3.5")	108.0 mm (4.25")	4.42	174.0	++	88.9 mm NUE Pin (3.5" NUE Pin)	88.9 mm NUE Pin (3.5" NUE Pin)	73.0 mm EUE Pin (2.875" EUE Pin)	0.4 m (16")	73 mm (2 7/8")	139.7 mm (5 1/2")	20, NG													
33-1200	205-4000			6.99	275.25				6.63	261.1																					
33-1500	205-5000			9.20	362.25				8.84	348.1																					
33-1875	205-6250			11.40	449.25				11.00	435.2																					
33-2400	205-8000			13.60	536.25				13.20	522.2																					
33-750	205-2500			4.78	188.00				4.60	181.0																					
33-1200	205-4000			6.99	275.25				6.81	268.1																					
33-1500	205-5000			9.20	362.25				9.02	355.1																					
33-1875	205-6250			11.40	449.25				11.20	442.2																					
33-2400	205-8000			13.60	536.25				13.40	529.2																					
39-750	245-2500			Slim Hole	45.8 mm (1.804")				4.65	183.00									22.2 mm (7/8")	88.9 mm (3.5")	108.0 mm (4.25")	4.29	169.0	++	88.9 mm NUE Pin (3.5" NUE Pin)	88.9 mm NUE Pin (3.5" NUE Pin)	73.0 mm EUE Pin (2.875" EUE Pin)	0.4 m (16")	60.3 mm (2 3/8")	139.7 mm (5 1/2")	20, NG
39-1125	245-3750								6.84	269.25												6.48	255.1								
39-1500	245-5000	9.05	356.25			8.69	342.1																								
39-1875	245-6250	11.20	442.25			10.80	428.2																								
39-750	245-2500	4.65	183.00			4.47	176.0																								
39-1125	245-3750	6.84	269.25			6.66	262.1																								
39-1500	245-5000	9.05	356.25			8.87	349.1																								
39-1875	245-6250	11.20	442.25			11.00	435.2																								
40-750	250-2500	2:3 Multi Lobe	41.3 mm (1.625")			3.73	147.00	22.2 mm (7/8")	69.9 mm (2.75")	78.2 mm (3.08")	3.56	140.0	++	60.3 mm EUE Pin (2.375" EUE Pin)	60.3 mm EUE Pin (2.375" EUE Pin)	60.3 mm EUE Pin (2.375" EUE Pin)	0.2 m (7.25")	60.3 mm (2 3/8")				114.3 mm (4 1/2")	NG								
40-1200	250-4000					5.49	216.00				5.34	210.1																			
40-1500	250-5000					7.26	286.00				7.11	280.1																			
40-750	250-2500					3.70	147.00				4.93	194.0																			
40-1200	250-4000			5.48	216.00	6.71	264.1																								
40-1500	250-5000	7.26	286.00	8.49	334.1																										
44-1000	275-3300	Slim Hole	57 mm (2.245")	5.14	202.50	25.4 mm (1")	95.3 mm (3.75")	114.3 mm (4.5") ▶	4.78	188.0	++	88.9 mm EUE Pin (3.5" EUE Pin)	88.9 mm EUE Pin (3.5" EUE Pin)	88.9 mm EUE Pin (3.5" EUE Pin)	0.4 m (16")	73 mm (2 7/8")	139.7 mm (5 1/2")	20, NG													
44-1250	275-4200			6.34	249.75				5.97	235.1																					
44-1500	275-5000			7.54	296.75				7.16	282.1																					
44-2000	275-6700			9.93	390.75				9.55	376.1																					
44-2500	275-8350			12.30	484.75				11.90	470.2																					
44-3000	275-10000			14.70	578.75				14.30	564.2																					
44-1000	275-3300			5.14	202.50				6.06	238.5																					
44-1250	275-4200			6.34	249.75				7.25	285.6																					
44-1500	275-5000			7.54	296.75				8.45	332.6																					
44-2000	275-6700			9.93	390.75				10.80	426.6																					
44-2500	275-8350			12.30	484.75				13.20	520.7																					
44-3000	275-10000			14.70	578.75				15.60	614.7																					
50-600	315-2000	Slim Hole	45.8 mm (1.804")	4.93	194.00	22.2 mm (7/8")	88.9 mm (3.5")	108.0 mm (4.25")	4.57	180.0	++	88.9 mm NUE Pin (3.5" NUE Pin)	88.9 mm NUE Pin (3.5" NUE Pin)	73.0 mm EUE Pin (2.875" EUE Pin)	0.4 m (16")	60.3 mm (2 3/8")	139.7 mm (5 1/2")	20, NG													
50-900	315-3000			7.22	284.25				6.86	270.1																					
50-1200	315-4000			9.51	374.25				9.15	360.1																					
50-1500	315-5000			11.70	464.25				11.40	450.2																					
50-600	315-2000			4.93	194.00				4.75	187.0																					
50-900	315-3000			7.22	284.25				7.04	277.1																					
50-1200	315-4000			9.51	374.25				9.32	367.1																					
50-1500	315-5000			11.70	464.25				11.60	457.2																					
54-600	340-2000			Slim Hole	58.3 mm (2.297")				4.47	176.00									25.4 mm (1")	95.3 mm (3.75")	114.3 mm (4.5") ▶	4.10	161.3	++	88.9 mm EUE Pin (3.5" EUE Pin)	88.9 mm EUE Pin (3.5" EUE Pin)	88.9 mm EUE Pin (3.5" EUE Pin)	0.4 m (16")	73 mm (2 7/8")	139.7 mm (5 1/2")	20, NG
54-900	340-3000								6.52	256.50												6.15	242.0								
54-1200	340-4000								8.57	337.50												8.19	322.6								
54-1500	340-5000								10.60	418.00												10.20	403.3								
54-1800	340-6000	12.60	498.75			12.20	483.9																								
54-600	340-2000	4.47	176.00			5.38	211.8																								
54-900	340-3000	6.52	256.50			7.43	292.5																								
54-1200	340-4000	8.57	337.50			9.48	373.1																								
54-1500	340-5000	10.60	418.00			11.50	453.8																								
54-1800	340-6000	12.60	498.75			13.50	534.4																								
55-300	345-1000	3 1/2" Insert	41.3 mm (1.625")			4.15	163.50	22.2 mm (7/8")	69.9 mm (2.75")		5.37	211.6	++	60.3 mm NUE Box (2.375" NUE Box)	60.3 mm NUE Box (2.375" NUE Box)	60.3 mm NUE Pin (2.375" NUE Pin)	0.2 m (7.25")	60.3 mm (2 3/8")				88.9 mm (3 1/2")	NG								
55-600	345-2000					8.15	321.00				9.38	369.2																			
55-900	345-3000			12.10	478.50	13.30	526.7																								

Pump			ROTOR					STATOR						Pump					
Metric	Imperial	Type	Drift Dia	Length		API Pin (Unless Noted)	Maximum OD		Length (Without Tag Bar)		Orbit Tube	Stator Discharge Thread	Stator Suction Thread	Tag Bar Suction Thread	Standard Tag Bar Length	Minimum Tubing Size. Threaded	Minimum Tubing Size. Inserted	Options	
m3/day/100rpm	bpd/100 rpm		(a)	(b)		(c)	Tube (d)	Collar (e)	(f)			(g)	(h)	(i)	(k)				
m of lift	ft of lift		mm (in)	m	in	mm (in)	mm (in)		m	in		mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)		mm (in)
64-600	400-2000	Slim Hole	57 mm (2.243")	4.78	188.00	25.4 mm (1")	114.3 mm (4.5")		4.50	177.0	+	88.9 mm EUE Box (3.5" EUE Box)	88.9 mm EUE Box (3.5" EUE Box)	88.9 mm EUE Pin (3.5" EUE Pin)	0.4 m (16")	73 mm (2 7/8")	139.7 mm (5 1/2")	20	
64-900	400-3000			7.02	276.50				6.75	265.6									
64-1200	400-4000			9.27	365.00				8.99	354.1									
64-1500	400-5000			11.50	453.50				11.20	442.7									
64-1800	400-6000			13.70	542.00				13.40	531.2									
64-600	400-2000			4.78	188.00				4.50	177.0									
64-900	400-3000			7.02	276.50				6.75	265.6									
64-1200	400-4000			9.27	365.00				8.99	354.1									
64-1500	400-5000			11.50	453.50				11.20	442.7									
64-1800	400-6000			13.70	542.00				13.40	531.2									
75-500	500-1700	Slim Hole	56.4 mm (2.219")	5.14	202.50	25.4 mm (1")	114.3 mm (4.5")		4.78	188.0	+	88.9 mm EUE Pin (3.5" EUE Pin)	88.9 mm EUE Pin (3.5" EUE Pin)	88.9 mm EUE Pin (3.5" EUE Pin)	0.4 m (16")	73 mm (2 7/8")	139.7 mm (5 1/2")	20, NG	
75-750	500-2500			7.54	296.75				7.16	282.1									
75-1000	500-3300			9.93	390.75				9.55	376.1									
75-1250	500-4200			12.30	484.75				11.90	470.2									
75-1500	500-5000			14.70	578.75				14.30	564.2									
75-500	500-1700			5.14	202.50				6.06	238.5									
75-750	500-2500			7.54	296.75				8.45	332.6									
75-1000	500-3300			9.93	390.75				10.80	426.6									
75-1250	500-4200			12.30	484.75				13.20	520.7									
75-1500	500-5000			14.70	578.75				15.60	614.7									
80-800	505-2650	Slim Hole	65.5 mm (2.578")	4.87	191.75	28.6 mm (1 1/8")	114.3 mm (4.5")		5.18	204.0	+	88.9 mm EUE Box (3.5" EUE Box)	88.9 mm EUE Box (3.5" EUE Box)	88.9 mm EUE Pin (3.5" EUE Pin)	0.4 m (16")	88.9 mm (3 1/2")	139.7 mm (5 1/2")	20, NG	
80-1000	505-3200			6.00	236.25				6.31	248.3									
80-1200	505-4000			7.12	280.50				7.43	292.6									
80-1600	505-5300			9.37	369.00				9.68	381.1									
80-1800	505-6000			10.50	413.25				10.80	425.4									
96-520	600-1750			4.87	191.75				5.11	201.1									
96-800	600-2650			7.12	280.25				7.36	289.7									
96-1040	600-3500			9.37	369.00				9.61	378.2									
96-1300	600-4300			11.50	453.50				11.80	466.7									
96-1560	600-5250			13.80	546.00				14.10	555.2									
96-520	600-1750	4.87	191.75	5.24	206.1														
96-800	600-2650	7.12	280.25	7.49	294.7														
96-1040	600-3500	9.37	369.00	9.73	383.2														
96-1300	600-4300	11.60	457.25	11.90	471.8														
96-1560	600-5250	13.80	546.00	14.20	560.3														
98-800	615-2650	Slim Hole	73.6 mm (2.899")	4.99	196.50	28.6 mm (1 1/8")	139.7 mm (5.5")		4.45	175.0	+	114.3 mm EUE Box & 139.7 mm LTC Pin (4.5" EUE Box & 5 1/2 LTC Pin)	114.3 mm EUE Box (4.5" EUE Box)	114.3 mm EUE Pin (4.5" EUE Pin)	0.8 m (30")	114.3 mm (4 1/2")			
98-1200	615-4000			7.21	284.00				6.67	262.6									
98-1600	615-5300			9.44	371.50				8.89	350.1									
98-1800	615-6000			10.50	415.25				10.00	393.9									
110-400	685-1300			5.14	202.50				4.78	188.0									
110-800	685-2650			9.93	390.75				9.55	376.1									
110-1000	685-3200			12.30	484.75				11.90	470.2									
110-1200	685-4000			14.70	578.75				14.30	564.2									
110-400	685-1300			5.14	202.50				6.06	238.5									
110-800	685-2650			9.93	390.75				10.80	426.6									
110-1000	685-3200	12.30	484.75	13.20	520.7														
110-1200	685-4000	14.70	578.75	15.60	614.7														
111-800	690-2650	Slim Hole	75.3 mm (2.966")	4.99	196.50	28.6 mm (1 1/8")	139.7 mm (5.5")		4.45	175.0	+	114.3 mm EUE Box & 139.7 mm LTC Pin (4.5" EUE Box & 5 1/2 LTC Pin)	114.3 mm EUE Box (4.5" EUE Box)	114.3 mm EUE Pin (4.5" EUE Pin)	0.8 m (30")	101.6 mm (4")			
111-1200	690-4000			7.21	284.00				6.67	262.6									
111-1600	690-5300			9.44	371.50				8.89	350.1									
111-1800	690-6000			10.50	415.25				10.00	393.9									
120-400	755-1350			4.87	191.75				5.11	201.1									
120-600	755-2000			7.12	280.25				7.36	289.7									
120-800	755-2650			9.37	369.00				9.61	378.2									
120-1000	755-3300			11.60	457.25				11.80	466.7									
120-1200	755-4000			13.80	546.00				14.10	555.2									
120-400	755-1350			4.87	191.75				5.24	206.1									
120-600	755-2000	7.12	280.25	7.49	294.7														
120-800	755-2650	9.37	369.00	9.73	383.2														
120-1000	755-3300	11.60	457.25	11.90	471.8														
120-1200	755-4000	13.80	546.00	14.20	560.3														

Pump			ROTOR					STATOR						Pump			Options	
Metric	Imperial	Type	Drift Dia	Length		API Pin (Unless Noted)	Maximum OD		Length (Without Tag Bar)		Orbit Tube	Stator Discharge Thread	Stator Suction Thread	Tag Bar Suction Thread	Standard Tag Bar Length	Minimum Tubing Size. Threaded		Minimum Tubing Size Inserted
m ³ /day/100rpm m of lift	bpd/100 rpm ft of lift		(a)	(b)		(c)	Tube (d)	Collar (e)	(f)			(g)	(h)	(i)	(k)			
			mm (in)	m	in	mm (in)	mm (in)	mm (in)	m	in	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)		
125-750	785-2500	Slim Hole	56.6 mm (2.23")	5.14	202.50	25.4 mm (1")	95.3 mm (3.75")	114.3 mm (4.5") ▶	4.78	188.0	++	88.9 mm EUE Pin (3.5" EUE Pin)	88.9 mm EUE Pin (3.5" EUE Pin)	88.9 mm EUE Pin (3.5" EUE Pin)	0.4 m (16")	73 mm (2 7/8")	139.7 mm (5 1/2")	
125-1200	785-4000			7.54	296.75				7.16	282.1							9.55	376.1
125-1500	785-5000			9.93	390.75				9.55	376.1							6.06	238.5
125-750	785-2500			5.14	202.50				8.45	332.6							10.80	426.6
125-1200	785-4000			7.54	296.75													
125-1500	785-5000			9.93	390.75													
130-650	820-2150			4.99	196.50	28.6 mm (1 1/8")	139.7 mm (5.5")	153.7 mm (6.05") When Using LTC Pin	4.45	175.0	+	114.3 mm EUE Box & 139.7 mm LTC Pin (4.5" EUE Box & 5 1/2 LTC Pin)	114.3 mm EUE Box (4.5" EUE Box)	114.3 mm EUE Pin (4.5" EUE Pin)	0.8 m (30")	101.6 mm (4")		
130-1300	820-4300	9.44	371.50	8.89	350.1				11.10	437.7								
130-1625	820-5380	11.60	459.00	13.30	525.2													
130-1950	820-6450	13.80	546.50															
145-320	900-1050	Slim Hole	57.8 mm (2.274")	5.14	202.50	25.4 mm (1")	95.3 mm (3.75")	114.3 mm (4.5") ▶	4.78	188.0	++	88.9 mm EUE Pin (3.5" EUE Pin)	88.9 mm EUE Pin (3.5" EUE Pin)	88.9 mm EUE Pin (3.5" EUE Pin)	0.4 m (16")	73 mm (2 7/8")	139.7 mm (5 1/2")	
145-640	900-2100			9.93	390.75				9.55	376.1							11.90	470.2
145-800	900-2650			12.30	484.75				14.30	564.2							6.06	238.5
145-960	900-3200			14.70	578.75				10.80	426.6							13.20	520.7
145-320	900-1050			5.14	202.50				15.60	614.7								
145-640	900-2100			9.93	390.75													
145-800	900-2650	12.30	484.75															
145-960	900-3200	14.70	578.75															
150-360	950-1200			5.25	206.50	25.4 mm (1")	114.3 mm (4.5")		5.58	219.5	+	88.9 mm EUE Box (3.5" EUE Box)	88.9 mm EUE Box (3.5" EUE Box)	88.9 mm EUE Pin (3.5" EUE Pin)	0.4 m (16")	88.9 mm (3 1/2")	139.7 mm (5 1/2")	
150-720	950-2400	10.10	398.00	10.40	411.1				12.80	506.9								
150-900	950-3000	12.50	493.75	15.30	602.7													
150-1100	950-3600	14.90	589.50															
200-900	1260-3000			5.76	226.75	RH1		194.5 mm (7.66")	5.08	200.0		177.8 mm LTC Pin (7" LTC Pin)	177.8 mm LTC Pin (7" LTC Pin)	168.3 mm BTC Pin (6.625" BTC Pin)	0.8 m (30")	139.7 mm (5 1/2")		
200-1350	1260-4500	8.31	327.00	7.62	300.1				8.47	333.4								
200-1500	1260-5000	9.15	360.25	10.10	400.1													
200-1800	1260-6000	10.80	427.00															
240-340	1500-1130			5.04	198.50	28.6 mm (1 1/8")	139.7 mm (5.5")	153.7 mm (6.05") When Using LTC Pin	4.50	177.0	+	114.3 mm EUE Box & 139.7 mm LTC Pin (4.5" EUE Box & 5 1/2 LTC Pin)	114.3 mm EUE Box (4.5" EUE Box)	114.3 mm EUE Pin (4.5" EUE Pin)	0.8 m (30")	101.6 mm (4")		
240-680	1500-2260	9.54	375.50	8.99	354.1				11.20	442.7								
240-850	1500-2800	11.70	464.00	13.40	531.2				5.03	198.0								
240-1020	1500-3400	14.00	552.50															
334-600	2100-2000			5.69	224.00	RH2		194.5 mm (7.66")	7.55	297.1		177.8 mm LTC Pin (7" LTC Pin)	177.8 mm LTC Pin (7" LTC Pin)	168.3 mm BTC Pin (6.625" BTC Pin)	0.8 m (30")	139.7 mm (5 1/2")		
334-900	2100-3000	8.21	323.25	10.00	396.1				12.50	495.2								
334-1200	2100-4000	10.70	422.25															
334-1500	2100-5000	13.20	521.25															
+	Stator fitted with an integral welded orbit tube. 0.51 m - 0.61 m (20" - 24") long and already included in the stator length							Option - 20	Rotor length extended by 0.51 m (20") in paddle or XXXL configuration. Tag bar changes to 0.91 m (36")				Rotor Head - 1			2 7/8" PAC Pin (73.0 mm)		
++	Stator fitted with an integral welded orbit tube. 1.02 m - 1.22 m (40" - 48") long and already included in the stator length							Option - 30	Rotor length extended by 0.76 m (30") in paddle or XXXL configuration. Tag bar changes to 0.91 m (36")				Rotor Head - 2			2.25" Stub Acme 2G Pin (57.2 mm)		
▶	Optional Slim Hole (Special Clearance) collar can be installed above the tag bar. OD becomes 106.2 mm (4.18") as per API specification							Option - NG	Stator available with option N0-GO (Top) Tagging System.									

Pump			ROTOR					STATOR						Pump						
Metric	Imperial	Type	Drift Dia	Length		API Pin (Unless Noted)	Maximum OD		Length (Without Tag Bar)	Orbit Tube	Stator Discharge Thread	Stator Suction Thread	Tag Bar Suction Thread	Standard Tag Bar Length	Minimum Tubing Size. Threaded	Minimum Tubing Size. Inserted	Options			
m ³ /day/100rpm m of lift	bpd/100 rpm ft of lift		(a)	(b)		(c)	Tube (d)	Collar (e)			(f)	(g)	(h)	(i)	(k)	mm (in)		mm (in)		
			mm (in)	m	in	mm (in)	mm (in)		m	in	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)				
16-600	094-2000	HTL (High Temperature Lock with OH Elastomer)	48.5 mm (1.91")	2.72	107.00	22.2 mm (7/8")	108 mm (4.25")		2.53	99.5	73.0 mm EUE Box (2.875" EUE Box)	73.0 mm EUE Box (2.875" EUE Box)	73.0 mm EUE Pin (2.875" EUE Pin)	0.4 m (16")	73 mm (2 7/8")	139.7 mm (5 1/2")	20			
16-1200	094-4000			5.09	200.25				4.88	192.1										
16-1800	094-6000			7.41	291.75				7.23	284.7										
16-2400	094-8000			9.77	384.50				9.58	377.2										
16-3000	094-10000			12.10	477.00				11.90	469.8										
32-900	200-3000			57.7mm (2.272")	4.48				176.50	4.30								169.3		
32-1800	200-6000			8.58	337.75				8.40	330.6										
45-400	280-1300			2.74	108.00				2.55	100.5										
45-800	280-2650			5.09	200.50				4.90	193.1										
45-1200	280-4000			7.44	293.00				7.26	285.7										
45-1600	280-5400			9.79	385.50				9.61	378.2										
54-600	340-2000			58.3 mm (2.297")	4.47				176.00	4.30								169.3		
54-1200	340-4000			8.57	337.50				8.40	330.6										
54-1800	340-6000			12.60	498.75				12.40	491.9										
74-200	495-660			2.73	107.50				2.55	100.5										
74-800	495-2650		9.78	385.00	9.61	378.2														
74-1000	495-3300		12.10	477.75	11.90	470.8														
74-1200	495-4000		14.40	570.25	14.30	563.4														
96-520	600-1750		58.1 mm (2.286")	4.87	191.75	5.18	204.0													
96-1040	600-3500		9.37	369.00	9.68	381.1														
96-1560	600-5250		13.80	546.00	14.10	558.2														
120-400	755-1350		57.8 mm (2.274")	4.87	191.75	5.18	204.0													
120-800	755-2650		9.37	369.00	9.68	381.1														
120-1200	755-4000		13.80	546.00	14.10	558.2														
155-150	975-500		61.1 mm (2.405")	2.73	107.50	3.04	119.5													
155-450	975-1500		7.43	292.50	7.74	304.7														
155-600	975-2000		9.78	385.00	10.00	397.2														
155-750	975-2500		12.10	477.75	12.40	489.8														
155-900	975-3000		14.40	570.25	14.70	582.4														
82-1200	520-4000		MTM (Metal-To-Metal)	80.9 mm (3.185")	6.83	269.00	28.6 mm (1 1/8")			141.3 mm (5.56")	5.61	221.0	127 mm LTC Pin (5" LTC pin)	127 mm LTC Pin (5" LTC pin)	114.3 mm EUE Pin (4.5" EUE Pin)	1.3 m (52")	114.3 mm (4 1/2")	Second line for each model designates HE (High Efficiency) MTM. 50% Increase in pump cavities.		
82-1200	520-4000	9.64		379.50	8.42	331.5														
218-700	1370-2200	90.9 mm (3.58")		6.83	269.00	153.7 mm (6.05")				5.61	221.0	139.7 mm LTC Pin (5.5" LTC Pin)							139.7 mm LTC Pin (5.5" LTC Pin)	139.7 mm LTC Box (5.5" LTC Box)
218-700	1370-2200	9.64		379.50	8.42	331.5														
300-510	1900-1600	90.9 mm (3.58")		6.83	269.00	153.7 mm (6.05")				5.61	221.0	139.7 mm LTC Pin (5.5" LTC Pin)							139.7 mm LTC Pin (5.5" LTC Pin)	139.7 mm LTC Box (5.5" LTC Box)

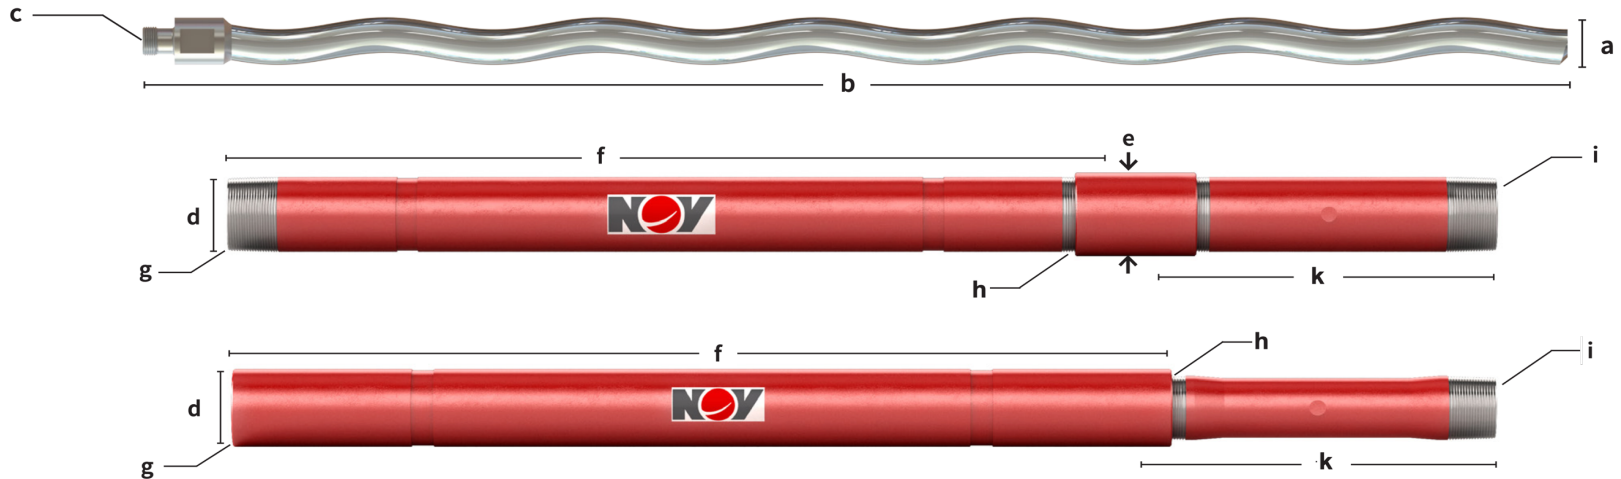

Pump			ROTOR				STATOR						Pump																											
Metric	Imperial	Type	Drift Dia	Length		API Pin (Unless Noted)	Maximum OD		Length (Without Tag Bar)		Orbit Tube	Stator Discharge Thread	Stator Suction Thread	Tag Bar Suction Thread	Standard Tag Bar Length	Minimum Tubing Size. Threaded	Minimum Tubing Size. Inserted	Options																						
m3/day/100rpm	bpd/100 rpm		(a)	(b)		(c)	Tube (d)	Collar (e)	(f)			(g)	(h)	(i)	(k)																									
m of lift	ft of lift		mm (in)	m	in	mm (in)	mm (in)		m	in		mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)																							
1-750	006-2500	2 7/8" Insert	31.8 mm (1.25")	1.14	44.75	15.9 mm (5/8")	57.2 mm (2.25")	N/A	1.75	69.1	+	50.8 mm ACME Box (2" ACME Box)	42.2 mm EUE Box (1.66" EUE Box)	42.2 mm EUE Pin (1.66" EUE Pin)	0.2 m (7.25")	N/A	2 7/8" Insert Pump Models (6.5 lb/ft or less)	NG																						
1-1500	006-5000			2.15	84.75				2.77	109.1																														
1-2250	006-7500			3.17	124.75				3.79	149.2																														
1-3000	006-10000			4.18	164.75				4.80	189.2																														
2-750	010-2500	2 7/8" Insert	31.8 mm (1.25")	1.14	44.75				15.9 mm (5/8")	57.2 mm (2.25")									N/A	1.75	69.1	+	50.8 mm ACME Box (2" ACME Box)	42.2 mm EUE Box (1.66" EUE Box)	42.2 mm EUE Pin (1.66" EUE Pin)	0.2 m (7.25")	N/A	2 7/8" Insert Pump Models (6.5 lb/ft or less)	NG											
2-1500	010-5000			2.15	84.75															2.77	109.1																			
2-2250	010-7500			3.17	124.75															3.79	149.2																			
3-600	015-2000			1.14	44.75															1.75	69.1																			
3-1200	015-4000	2 7/8" Insert	31.8 mm (1.25")	2.15	84.75															15.9 mm (5/8")	57.2 mm (2.25")									N/A	2.77	109.1	+	50.8 mm ACME Box (2" ACME Box)	42.2 mm EUE Box (1.66" EUE Box)	42.2 mm EUE Pin (1.66" EUE Pin)	0.2 m (7.25")	N/A	2 7/8" Insert Pump Models (6.5 lb/ft or less)	NG
3-1800	015-6000			3.17	124.75																										3.79	149.2								
3-2400	015-8000			4.18	164.75																										4.80	189.2								
3-3000	015-10000			5.21	205.00																										5.82	229.2								
6-700	044-2300	2 7/8" Insert	31.8 mm (1.25")	2.60	102.50	15.9 mm (5/8")	57.2 mm (2.25")	N/A			3.23	127.2	+	50.8 mm ACME Box (2" ACME Box)	42.2 mm EUE Box (1.66" EUE Box)	42.2 mm EUE Pin (1.66" EUE Pin)	0.2 m (7.25")	N/A													2 7/8" Insert Pump Models (6.5 lb/ft or less)	NG								
6-1050	044-3500			3.85	151.50						4.48	176.2																												
6-1400	044-4590			5.10	200.75						5.72	225.3																												
6-1750	044-5750			6.34	249.75						6.97	274.4																												
6-2100	044-6900			7.59	298.75				8.22	323.5																														
6-2450	044-8050			8.84	348.00				9.46	372.6																														
9-400	060-1325	Slim Hole 2 7/8" Insert	31.8 mm (1.25")	1.92	75.75				15.9 mm (5/8")	57.2 mm (2.25")	N/A	2.52							99.1			+	50.8 mm ACME Box (2" ACME Box)	42.2 mm EUE Box (1.66" EUE Box)	42.2 mm EUE Pin (1.66" EUE Pin)	0.2 m (7.25")	N/A	2 7/8" Insert Pump Models (6.5 lb/ft or less)	NG											
9-800	060-2650			3.70	145.75							4.30							169.2																					
9-1200	060-4000			5.49	216.00							6.08							239.2																					
9-1600	060-5300			7.26	286.00							7.86							309.3																					
9-2000	060-6700	2 7/8" Insert	31.8 mm (1.25")	9.02	355.00							15.9 mm (5/8")							57.2 mm (2.25")	N/A	9.64									379.4			+	50.8 mm ACME Box (2" ACME Box)	42.2 mm EUE Box (1.66" EUE Box)	42.2 mm EUE Pin (1.66" EUE Pin)	0.2 m (7.25")	N/A	2 7/8" Insert Pump Models (6.5 lb/ft or less)	NG
20-400	125-1300			3.67	144.50																4.29									169.1										
20-600	125-2000			5.45	214.50	6.07	239.2																																	
20-800	125-2600			7.23	284.50	7.85	309.2																																	
20-1000	125-3300			9.01	354.75	9.63	379.3																																	
20-1200	125-4000			10.70	424.75	11.40	449.4																																	
4-750	025-2500	Slim Hole	38.1 mm (1.5")	1.54	60.75	19.1 mm (3/4")	69.9 mm (2.75")	N/A					1.55	61.0	++	60.3 mm NUE Box (2.375" NUE Box)	60.3 mm NUE Box (2.375" NUE Box)	60.3 mm NUE Pin (2.375" NUE Pin)			0.2 m (7.25")									N/A	3 1/2" Insert Pump Models (9.3 lb/ft or less)	30, NG								
4-1200	025-4000			2.20	86.75								2.21	87.0																										
4-1500	025-5000			2.94	115.75				2.95	116.0																														
4-1950	025-6500			3.61	142.00				3.61	142.1																														
4-2400	025-8000			4.26	167.75				4.27	168.1																														
4-3000	025-10000			5.73	225.75				5.74	226.1																														
7-750	045-2500	Slim Hole	41.3 mm (1.625")	2.22	87.50				22.2 mm (7/8")	69.9 mm (2.75")	N/A	3.44	135.5	++					60.3 mm NUE Box (2.375" NUE Box)	60.3 mm NUE Box (2.375" NUE Box)		60.3 mm NUE Pin (2.375" NUE Pin)	0.2 m (7.25")	N/A	3 1/2" Insert Pump Models (9.3 lb/ft or less)	30, NG (2 7/8" EUE Pup Joint Required for NG)														
7-1200	045-4000			3.43	135.00							4.65	183.0																											
7-1500	045-5000			4.24	167.00							5.46	215.0																											
7-1800	045-6000			5.07	199.50							6.29	247.6																											
7-2400	045-8000			6.71	264.00							7.93	312.1																											
7-3000	045-10000			8.33	328.00							9.55	376.1																											
9-400	060-1325	3 1/2" Insert	31.8 mm (1.25")	1.92	75.75	22.2 mm (7/8")	69.9 mm (2.75")	N/A				1.96	77.2		++	60.3 mm NUE Box (2.375" NUE Box)	60.3 mm NUE Box (2.375" NUE Box)	60.3 mm NUE Pin (2.375" NUE Pin)			0.2 m (7.25")					N/A	3 1/2" Insert Pump Models (9.3 lb/ft or less)	NG												
9-800	060-2650			3.70	145.75							3.74	147.2																											
9-1200	060-4000			5.49	216.00							5.52	217.3																											
9-1600	060-5300			7.26	286.00							7.30	287.4																											
9-2000	060-6700			9.02	355.00							9.08	357.5																											
21-660	131-2175			3.89	153.00							5.11	201.2																											
21-880	131-2900	5.13	202.00	6.35	250.2																																			
21-1100	131-3600	6.38	251.00	7.60	299.2																																			
21-1320	131-4350	7.62	300.00	8.85	348.2																																			
21-1540	131-5100	8.87	349.25	10.00	397.3																																			
21-2200	131-7200	12.60	496.25	13.80	544.4																																			
22-750	135-2500	2:3 Multilobe Slim Hole	41.3 mm (1.625")	1.93	76.00				22.2 mm (7/8")	69.9 mm (2.75")	N/A	3.15	124.1	++					60.3 mm NUE Box (2.375" NUE Box)	60.3 mm NUE Box (2.375" NUE Box)		60.3 mm NUE Pin (2.375" NUE Pin)	0.2 m (7.25")	N/A	3 1/2" Insert Pump Models (9.3 lb/ft or less)			NG												
22-1500	135-5000			3.71	146.00	4.93	194.1																																	
22-2250	135-7500			5.49	216.00	6.71	264.2																																	
22-3000	135-10000			7.26	286.00	8.49	334.2																																	
40-750	250-2500	2:3 Multilobe Slim Hole	41.3 mm (1.625")	3.70	145.75	22.2 mm (7/8")	69.9 mm (2.75")	N/A				4.93	194.0		++	60.3 mm NUE Box (2.375" NUE Box)	60.3 mm NUE Box (2.375" NUE Box)	60.3 mm NUE Pin (2.375" NUE Pin)			0.2 m (7.25")					N/A	3 1/2" Insert Pump Models (9.3 lb/ft or less)	NG												
40-1200	250-4000			5.48	215.75							6.71	264.1																											
40-1500	250-5000			7.26	285.75							8.49	334.1																											
55-300	345-1000			4.15	163.50							5.37	211.6																											
55-600	345-2000	3 1/2" Insert	41.3 mm (1.625")	8.15	321.00							22.2 mm (7/8")	69.9 mm (2.75")															N/A	9.38	369.2	++	60.3 mm NUE Box (2.375" NUE Box)	60.3 mm NUE Box (2.375" NUE Box)	60.3 mm NUE Pin (2.375" NUE Pin)	0.2 m (7.25")	N/A	3 1/2" Insert Pump Models (9.3 lb/ft or less)	NG		
55-900	345-3000			12.10	478.50																								13.30	526.7										