

Tubing Swivel Sub

The NOV Tubing Swivel Sub is designed for easy make-up of tubing below a multi-string packer eliminating the need to rotate the packer. The swivel sub has a tensile strength suitable for high tailpipe weights.

The Tubing Swivel Sub is ideal for installations with tailpipe run in deviated or horizontal wells. Mechanical set packers or tubing anchors can be rotated and set without rotating the tailpipe.

Features


- Allows easy make-up of tubing string below multiple string packer.
- Standard EU 8 RD connections, premium connections available upon request.
- Premium materials available upon request for hostile environments.

Benefits

- Eliminates tailpipe torque in deviated or horizontal wells when setting packer or tubing anchor in vertical section.

Applications

- Multiple string completions
- Retrievable-packer systems
- Tubing Anchor Catchers with tailpipe below

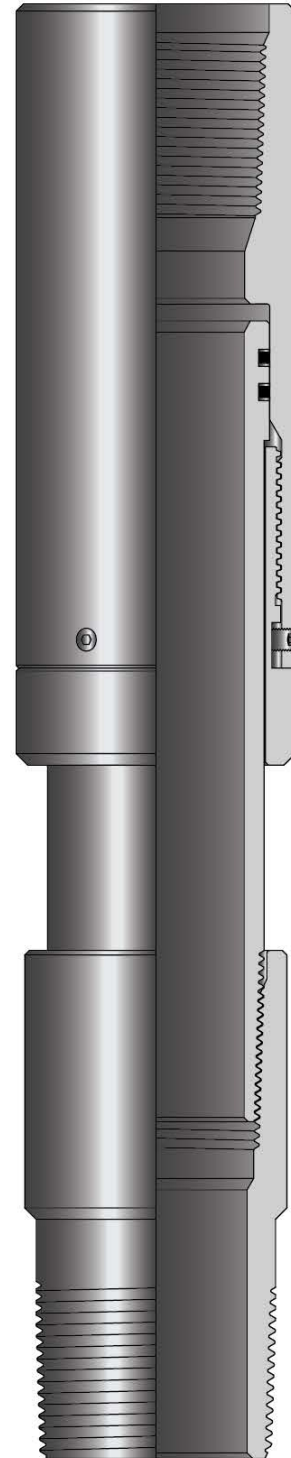

Technical Data

Tubing Size in. (mm)	Max. O.D. In. (mm)	Min. I.D. In. (mm)	Thread Connection	Product Number
2.375 60,33	3.068 77,93	1.985 50,42	2.375" EU 8 RD	530-23
2.875 73,03	3.688 93,68	2.441 62,00	2.875" EU 8 RD	530-25
3.500 88,90	4.500 114,30	2.992 76,00	3.500" EU 8 RD	530-35