

Tubing Swivel

The NOV Tubing Swivel provides a safe means of rotating the tubing string while circulating with a treating line connected. It is primarily used with the NWT wash tool or the NSTP straddle packer, to provide a means of operating the by-pass valve with the treating line connected.

The Tubing Swivel may also be used with other service and production tools or for light drilling. It is recommended to use a safety chain or cable to secure treating line or hoses when using the swivel.

Features


- Double seals in swivel body
- Standard EU 8 RD connections, premium connections available upon request
- Top port or side port available. Specify when ordering

Benefits

- Treating line remains connected during rotation of tubing
- Ability to rotate while washing sand from bridge plugs

Applications

- Multiple zone treating
- Light drilling such as washing sand from bridge plugs

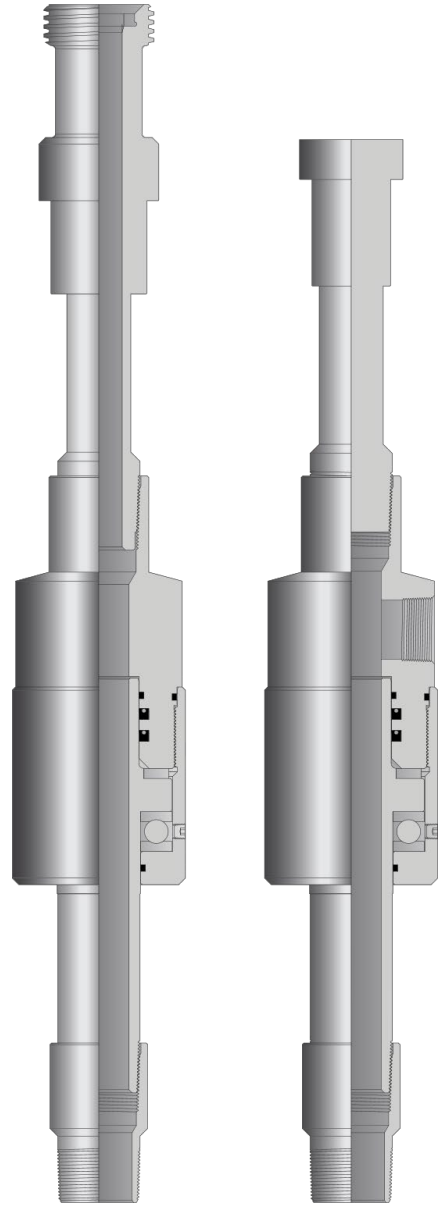

Technical Data

Tubing Size in. (mm)	Operating Load Rating lb (kg)	Side Port Connection in. (mm)	Thread Connection	Product Number
2.875 73,03	100,000 45359,24	2.000 50,80	2.875" EU 8 RD	10-015-0250
3.500 88,90	135,000 61234,97	2.000 50,80	3.500" EU 8 RD	10-015-0350