

STAR™ Aliphatic Amine Line Pipe (High Pressure - STANDARD DESIGN - Product Data)

Product Description

- Pressure - Up to 3500 psi (24,1 MPa)
- Resin System - Aliphatic Amine Cured Epoxy
- Reinforcement - Premium Fiberglass
- Joining Systems - API 8rd Threaded
- Joint Length - 30 Feet (9,1 mts) Nominal
Random Lengths of 20 to 32 Feet (6,1 to 9,8 mts)
- Temperature - Up to 200° F (93.3° C) Maximum
- Sizes - 1½ through 8 inches - API 8rd Thread
- Fittings - A variety of filament wound API 5B threaded fittings are available. Purchase all fittings by thread size and design pressure rating only.

High Pressure Design ≥ 500 psi

- Design Life - 20 years at full rating
- Design Temperature - 150° F (65.6° C)
- Wall Thickness - Nominal
- Hoop Stress - Average Long-Term Hydrostatic Strength (LTHS), ASTM D2992-B
- 100% Factory Hydro Test - All sizes 1.25 times the Series pressure rating
- Non API Design

Flow Factors

- Hazen Williams C=150
- Absolute Roughness = 0.00021 in. (0.00533 mm)

Nominal Moduli

- Hoop Modulus of Elasticity
 - 73°F - 4.3 x 10⁶ psi (29.7 GPa)
 - 150°F - 3.6 x 10⁶ psi (24.6 GPa)
 - 200°F - 2.5 x 10⁶ psi (17.0 GPa)
- Axial Modulus of Elasticity
 - 73°F - 2.3 x 10⁶ psi (16.1 GPa)
 - 150°F - 1.9 x 10⁶ psi (13.3 GPa)
 - 200°F - 1.3 x 10⁶ psi (9.2 GPa)
- Poisson's Ratio
 - $v_{ah} = 0.38$ (minor)
 - $v_{na} = 0.69$ (major)

Physical Properties

- Density = 124 lbs/cu ft (1986 kgs/cu m)
- Specific Gravity = 1.99

Thermal Properties

- Coefficient of Thermal Conductivity
0.23 BTU/(ft•hr•°F) (0.4 W/(m•C°))
- Axial Coefficient of Thermal Expansion
10.4 x 10⁻⁶ in/in/°F (18,8 x 10⁻⁶ mm/mm/°C)
- Hoop Coefficient of Thermal Expansion
6.2 x 10⁻⁶ in/in/°F (11,2 x 10⁻⁶ mm/mm/°C)

Benefits


- Corrosion Control
- Reduced Installation Costs
- Improved Flow Efficiency
- Reduced Paraffin & Scale Build-Up
- Reduced Maintenance Cost

Applications

- Production Lines or Injection Lines
- Transfer Lines or Disposal Lines
- Oil, Gas, Saltwater, CO₂ and H₂S

Joining System

Advanced Composite Thread (ACT)

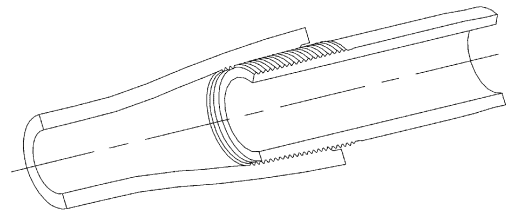

- ACT - Molded threads using a graphite, ceramic and epoxy composite for high performance applications.
- All 1½" EUE 10rd and 2 3/8" - 4 1/2" EUE 8rd API threads conform to API 5B Table 14, 14th Edition (L4 is minimum) and all 5 1/2" - 9 5/8" OD 8rd casing threads conform to API 5B Table 7, 14th Edition (L4 is minimum).

SIZE		NOMINAL PIPE DIMENSIONS					Minimum Bending Radius		Short Term Tensile Rating	
Pipe	Thread	Inside Diameter In (mm)	Outside Diameter In (mm)	Wall Thickness In (mm)	Pipe Weight lbs/ft (kg/m)	Connection Diameter In (mm)	Ft	(m)	Lbs	(kgs)

Series 500 (3,4 MPa) ⁽¹⁾		500@150°F (65,6°C) 450@180°F (82,2°C) 400@200°F (93,3°C)								
3	3 1/2	2.94 (74,7)	3.07 (78,0)	0.05 (1,3)	0.70 (1,0)	4.05 (102,9)	154 (46,9)	1800 (816)		
4	4 1/2	3.85 (97,8)	4.02 (102,1)	0.07 (1,8)	1.20 (1,8)	5.09 (129,3)	201 (61,3)	3000 (1361)		
5	^{TC} 5 1/2	4.74 (120,4)	4.91 (124,7)	0.09 (2,3)	1.80 (2,7)	6.25 (158,8)	246 (75,0)	3600 (1633)		
6	6 5/8	5.93 (150,6)	6.15 (156,2)	0.11 (2,8)	2.10 (3,1)	7.10 (180,3)	308 (93,9)	5800 (2631)		
8	8 5/8	7.74 (196,6)	8.03 (204,0)	0.15 (3,8)	3.90 (5,8)	9.25 (235,0)	401 (122,2)	10300 (4672)		

Series 800 (5,5 MPa) ⁽¹⁾		800@150°F (65,6°C) 700@180°F (82,2°C) 650@200°F (93,3°C)								
2	2 3/8	1.94 (49,3)	2.11 (53,6)	0.08 (2,0)	0.54 (0,8)	2.94 (74,7)	106 (32,3)	1600 (726)		
2 1/2	2 7/8	2.37 (60,2)	2.53 (64,3)	0.08 (2,0)	0.60 (0,9)	3.55 (90,2)	127 (38,7)	1800 (816)		
3	3 1/2	2.94 (74,7)	3.11 (79,0)	0.09 (2,3)	0.85 (1,3)	4.10 (104,1)	156 (47,5)	2400 (1089)		
4	4 1/2	3.85 (97,8)	4.08 (103,6)	0.11 (2,8)	1.49 (2,2)	5.22 (132,6)	204 (62,2)	4200 (1905)		
5	^{TC} 5 1/2	4.74 (120,4)	5.02 (127,5)	0.14 (3,6)	2.50 (3,7)	6.25 (158,8)	251 (76,5)	6100 (2767)		
6	6 5/8	5.50 (139,7)	5.83 (148,1)	0.17 (4,3)	3.10 (4,6)	7.35 (186,7)	292 (89,0)	8300 (3765)		
6	6 5/8	5.93 (150,6)	6.27 (159,3)	0.17 (4,3)	3.10 (4,6)	7.30 (185,4)	314 (95,7)	9200 (4173)		
8	8 5/8	7.74 (196,6)	8.18 (207,8)	0.22 (5,6)	5.80 (8,6)	9.55 (242,6)	409 (124,7)	15800 (7167)		

Series 1000 (6,9 MPa) ⁽¹⁾		1000@150°F (65,6°C) 900@180°F (82,2°C) 850@200°F (93,3°C)								
2	2 3/8	1.94 (49,3)	2.11 (53,6)	0.08 (2,0)	0.55 (0,8)	3.00 (76,2)	106 (32,3)	1600 (726)		
2 1/2	2 7/8	2.37 (60,2)	2.54 (64,5)	0.09 (2,3)	0.70 (1,0)	3.55 (90,2)	127 (38,7)	1900 (862)		
3	3 1/2	2.94 (74,7)	3.15 (80,0)	0.11 (2,8)	1.03 (1,5)	4.20 (106,7)	158 (48,2)	2900 (1315)		
4	4 1/2	3.85 (97,8)	4.14 (105,2)	0.14 (3,6)	1.80 (2,7)	5.35 (135,9)	207 (63,1)	5200 (2359)		
5	^{TC} 5 1/2	4.74 (120,4)	5.09 (129,3)	0.17 (4,3)	2.90 (4,3)	6.25 (158,8)	254 (77,4)	7500 (3402)		
6	6 5/8	5.50 (139,7)	5.91 (150,1)	0.21 (5,3)	3.70 (5,5)	7.45 (189,2)	296 (90,2)	10400 (4717)		
6	6 5/8	5.93 (150,6)	6.38 (162,1)	0.22 (5,6)	4.10 (6,1)	7.50 (190,5)	319 (97,2)	12000 (5443)		
8	8 5/8	7.74 (196,6)	8.29 (210,6)	0.28 (7,1)	7.10 (10,6)	9.75 (247,7)	415 (126,5)	19800 (8981)		

Series 1250 (8,6 MPa) ⁽¹⁾		1250@150°F (65,6°C) 1100@180°F (82,2°C) 1050@200°F (93,3°C)								
2	2 3/8	1.94 (49,3)	2.14 (54,4)	0.09 (2,3)	0.62 (0,9)	3.00 (76,2)	107 (32,6)	1800 (816)		
2 1/2	2 7/8	2.37 (60,2)	2.58 (65,5)	0.11 (2,8)	0.80 (1,2)	3.60 (91,4)	129 (39,3)	2300 (1043)		
3	3 1/2	2.94 (74,7)	3.22 (81,8)	0.14 (3,6)	1.33 (2,0)	4.33 (110,0)	161 (49,1)	3900 (1769)		
4	4 1/2	3.85 (97,8)	4.20 (106,7)	0.18 (4,6)	2.16 (3,2)	5.44 (138,2)	210 (64,0)	6300 (2858)		
5	^{TC} 5 1/2	4.74 (120,4)	5.18 (131,6)	0.22 (5,6)	3.50 (5,2)	6.45 (163,8)	259 (78,9)	9600 (4355)		
6	6 5/8	5.50 (139,7)	6.00 (152,4)	0.25 (6,4)	4.50 (6,7)	7.57 (192,3)	300 (91,4)	12700 (5761)		
6	7	5.93 (150,6)	6.48 (164,6)	0.27 (6,9)	5.20 (7,7)	8.00 (203,2)	324 (98,8)	14900 (6759)		
8	8 5/8	7.74 (196,6)	8.44 (214,4)	0.35 (8,9)	8.80 (13,1)	10.00 (254,0)	422 (128,6)	25300 (11476)		

Series 1500 (10,3 MPa) ⁽¹⁾		1500@150°F (65,6°C) 1350@180°F (82,2°C) 1250@200°F (93,3°C)								
1 1/2	1.90	1.44 (36,6)	1.61 (40,9)	0.08 (2,0)	0.41 (0,6)	2.50 (63,5)	80 (24,4)	1200 (544)		
2	2 3/8	1.94 (49,3)	2.17 (55,1)	0.11 (2,8)	0.72 (1,1)	3.04 (77,2)	109 (33,2)	2100 (953)		
2 1/2	2 7/8	2.37 (60,2)	2.62 (66,5)	0.13 (3,3)	1.00 (1,5)	3.67 (93,2)	131 (39,9)	2800 (1270)		
3	3 1/2	2.94 (74,7)	3.27 (83,1)	0.16 (4,1)	1.58 (2,4)	4.43 (112,5)	164 (50,0)	4600 (2087)		
4	4 1/2	3.85 (97,8)	4.28 (108,7)	0.21 (5,3)	2.62 (3,9)	5.59 (142,0)	214 (65,2)	7800 (3538)		
5	^{TC} 5 1/2	4.74 (120,4)	5.27 (133,9)	0.26 (6,6)	4.20 (6,2)	6.60 (167,6)	263 (80,2)	11700 (5307)		
6	6 5/8	5.50 (139,7)	6.11 (155,2)	0.31 (7,9)	5.50 (8,2)	7.74 (196,6)	306 (93,3)	15700 (7122)		
6	7	5.93 (150,6)	6.59 (167,4)	0.33 (8,4)	6.30 (9,4)	8.20 (208,3)	330 (100,6)	18200 (8256)		
8	8 5/8	7.43 (188,7)	8.27 (210,1)	0.42 (10,7)	10.50 (15,6)	10.25 (260,4)	414 (126,2)	29200 (13245)		
8	9 5/8	7.74 (196,6)	8.59 (218,2)	0.43 (10,9)	12.10 (18,0)	11.40 (289,6)	430 (131,1)	31100 (14107)		

All products are produced integral joint unless indicated (TC) Threaded and Coupled

SIZE		NOMINAL PIPE DIMENSIONS						Minimum Bending Radius		Short Term Tensile Rating	
Pipe	Thread	Inside Diameter In (mm)	Outside Diameter In (mm)	Wall Thickness In (mm)	Pipe Weight lbs/ft (kg/m)	Connection Diameter In (mm)	Ft	(m)	Lbs	(kgs)	

Series 1750 (12,1 MPa) ⁽¹⁾										
1750@150°F (65,6°C) 1550@180°F (82,2°C) 1450@200°F (93,3°C)										
1½	1.90	1.44 (36,6)	1.63 (41,4)	0.09 (2,3)	0.47 (0,7)	2.56 (65,0)	82 (25,0)	1300 (590)		
2	2 ¾	1.94 (49,3)	2.20 (55,9)	0.13 (3,3)	0.83 (1,2)	3.14 (79,8)	110 (33,5)	2400 (1089)		
2½	2 7/8	2.37 (60,2)	2.67 (67,8)	0.15 (3,8)	1.20 (1,8)	3.76 (95,5)	134 (40,8)	3400 (1542)		
3	3 ½	2.94 (74,7)	3.34 (84,8)	0.19 (4,8)	1.88 (2,8)	4.57 (116,1)	167 (50,9)	5600 (2540)		
4	4 ½	3.85 (97,8)	4.36 (110,7)	0.25 (6,4)	3.15 (4,7)	5.72 (145,3)	218 (66,4)	9400 (4264)		
5	^{TC} 5 ½	4.74 (120,4)	5.35 (135,9)	0.30 (7,6)	4.80 (7,1)	7.00 (177,8)	267 (81,4)	13600 (6169)		
6	6 5/8	5.50 (139,7)	6.21 (157,7)	0.36 (9,1)	6.30 (9,4)	7.92 (201,2)	311 (94,8)	18500 (8392)		
6	7	5.93 (150,6)	6.70 (170,2)	0.38 (9,7)	7.30 (10,9)	8.39 (213,1)	335 (102,1)	21600 (9798)		
8	8 5/8	7.43 (188,7)	8.42 (213,9)	0.49 (12,4)	12.20 (18,2)	10.50 (266,7)	421 (128,3)	34700 (15740)		
8	9 5/8	7.74 (196,6)	8.73 (221,7)	0.50 (12,7)	13.80 (20,5)	11.60 (294,6)	437 (133,2)	36500 (16556)		

Series 2000 (13,8 MPa) ⁽¹⁾										
2000@150°F (65,6°C) 1800@180°F (82,2°C) 1700@200°F (93,3°C)										
1½	1.90	1.44 (36,6)	1.68 (42,7)	0.11 (2,8)	0.58 (0,9)	2.65 (67,3)	84 (25,6)	1700 (771)		
2	2 ¾	1.94 (49,3)	2.24 (56,9)	0.15 (3,8)	0.95 (1,4)	3.21 (81,5)	112 (34,1)	2800 (1270)		
2½	2 7/8	2.37 (60,2)	2.72 (69,1)	0.18 (4,6)	1.40 (2,1)	3.85 (97,8)	136 (41,5)	4000 (1814)		
3	3 ½	2.94 (74,7)	3.39 (86,1)	0.22 (5,6)	2.14 (3,2)	4.66 (118,4)	169 (51,5)	6300 (2858)		
4	4 ½	3.85 (97,8)	4.43 (112,5)	0.29 (7,4)	3.60 (5,4)	5.91 (150,1)	222 (67,7)	10800 (4899)		
5	^{TC} 5 ½	4.74 (120,4)	5.45 (138,4)	0.36 (9,1)	5.50 (8,2)	7.00 (177,8)	273 (83,2)	16200 (7348)		
6	6 5/8	5.50 (139,7)	6.33 (160,8)	0.41 (10,4)	7.40 (11,0)	8.22 (208,8)	316 (96,3)	21700 (9843)		
6	7	5.93 (150,6)	6.82 (173,2)	0.44 (11,2)	8.40 (12,5)	8.59 (218,2)	341 (103,9)	25000 (11340)		
8	8 5/8	7.43 (188,7)	8.57 (217,7)	0.57 (14,5)	14.00 (20,8)	10.75 (273,1)	428 (130,5)	40300 (18280)		
8	9 5/8	7.74 (196,6)	8.90 (226,1)	0.58 (14,7)	16.00 (23,8)	12.00 (304,8)	445 (135,6)	43000 (19505)		

Series 2500 (17,2 MPa) ⁽¹⁾										
2500@150°F (65,6°C) 2250@180°F (82,2°C) 2100@200°F (93,3°C)										
1½	1.90	1.44 (36,6)	1.72 (43,7)	0.14 (3,6)	0.68 (1,0)	2.80 (71,1)	86 (26,2)	2000 (907)		
2	2 ¾	1.94 (49,3)	2.33 (59,2)	0.19 (4,8)	1.24 (1,8)	3.40 (86,4)	117 (35,7)	3700 (1678)		
2½	2 7/8	2.37 (60,2)	2.82 (71,6)	0.23 (5,8)	1.80 (2,7)	4.03 (102,4)	141 (43,0)	5200 (2359)		
3	3 ½	2.94 (74,7)	3.53 (89,7)	0.29 (7,4)	2.86 (4,3)	4.95 (125,7)	177 (53,9)	8500 (3856)		
4	4 ½	3.85 (97,8)	4.62 (117,3)	0.37 (9,4)	4.76 (7,1)	6.27 (159,3)	231 (70,4)	14500 (6577)		
6	7	5.50 (139,7)	6.56 (166,6)	0.53 (13,5)	9.70 (14,4)	9.01 (228,9)	328 (100,0)	28300 (12837)		

Series 3000 (19,0 MPa) ⁽¹⁾										
3000@150°F (65,6°C) 2700@180°F (82,2°C) 2550@200°F (93,3°C)										
1½	1.90	1.44 (36,6)	1.79 (45,5)	0.17 (4,3)	0.86 (1,3)	2.93 (74,4)	89 (27,1)	2500 (1134)		
2	2 ¾	1.94 (49,3)	2.41 (61,2)	0.23 (5,8)	1.51 (2,2)	3.61 (91,7)	120 (36,6)	4500 (2041)		
2½	2 7/8	2.37 (60,2)	2.92 (74,2)	0.28 (7,1)	2.20 (3,3)	4.23 (107,4)	146 (44,5)	6500 (2948)		
3	3 ½	2.94 (74,7)	3.65 (92,7)	0.35 (8,9)	3.45 (5,1)	5.26 (133,6)	183 (55,8)	10400 (4717)		
3½	4 ½	3.33 (84,6)	4.15 (105,4)	0.40 (10,2)	4.70 (7,0)	6.59 (167,4)	207 (63,1)	13600 (6169)		
4	5 ½	3.85 (97,8)	4.78 (121,4)	0.46 (11,7)	5.84 (8,7)	6.63 (168,4)	239 (72,8)	17900 (8119)		

Series 3500 (24,1 MPa) ⁽¹⁾										
3500@150°F (65,6°C) 3150@180°F (82,2°C) 2950@200°F (93,3°C)										
1½	1.90	1.44 (36,6)	1.86 (47,2)	0.21 (5,3)	1.05 (1,6)	3.12 (79,2)	93 (28,3)	3100 (1406)		
2	2 ¾	1.94 (49,3)	2.50 (63,5)	0.28 (7,1)	1.86 (2,8)	3.89 (98,8)	125 (38,1)	5600 (2540)		
2½	2 7/8	2.37 (60,2)	3.04 (77,2)	0.34 (8,6)	2.70 (4,0)	4.45 (113,0)	152 (46,3)	8100 (3674)		
3	^{TC} 4 ½	2.94 (74,7)	3.76 (95,5)	0.41 (10,4)	4.90 (7,3)	7.00 (177,8)	188 (57,3)	12200 (5534)		
3½	4 ½	3.33 (84,6)	4.29 (109,0)	0.48 (12,2)	5.57 (8,3)	7.02 (178,3)	215 (65,5)	16300 (7394)		
4	5 ½	3.85 (97,8)	4.96 (126,0)	0.55 (14,0)	7.75 (11,5)	8.19 (208,0)	248 (75,6)	21800 (9888)		

All products are produced integral joint unless indicated (TC) Threaded and Coupled

NOTE: Additional pressure classes are available on request.

⁽¹⁾ **Series Rating** - All ratings are maximum operating limits. Exceeding these limits will void the warranty on all NOV Fiber Glass Systems pipe.

Joining System Information (API 8rd Thread)

Joining System Pipe Size - Inches	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	6"	8"	8"	
Thread Size	1.90" EUE 10rd	2 3/8" EUE 8rd	2 7/8" EUE 8rd	3 1/2" EUE 8rd	4 1/2" EUE 8rd	5 1/2" OD 8rd	6 5/8" OD 8rd	7" OD 8rd	8 5/8" OD 8rd	9 5/8" OD 8rd	
• Pin Upset O.D.	In (mm)	2.15 (54,6)	2.60 (66,0)	3.10 (78,7)	3.75 (95,3)	4.75 (120,7)	5.55 (141,0)	6.65 (168,9)	7.05 (179,1)	8.65 (219,7)	9.65 (245,1)
• Thread Length	In (mm)	2.36 (59,9)	2.94 (74,7)	3.25 (82,6)	3.50 (88,9)	3.88 (98,6)	4.75 (120,7)	4.25 (108,0)	4.88 (124,0)	4.85 (123,2)	5.13 (130,3)
• Make Up Length Loss	In (mm)	2.06 (52,4)	2.56 (65,1)	2.86 (73,0)	3.13 (79,4)	3.50 (88,9)	4.38 (111,1)	3.88 (98,4)	4.50 (114,3)	4.50 (114,3)	4.75 (120,7)

Pipe Capacity			
Size	Inside Diameter		Capacity
Pipe	In	(mm)	Bbls/1,000 ft. (m ³ /km)
1 1/2	1.44	(36,6)	2.00 (1,0)
2	1.94	(49,3)	3.70 (1,9)
2 1/2	2.37	(60,2)	5.40 (2,8)
3	2.94	(74,7)	8.40 (4,4)
4	3.85	(97,8)	14.40 (7,5)
5	4.74	(120,4)	21.80 (11,4)
6	5.50	(139,7)	29.40 (15,3)
6	5.93	(150,6)	34.20 (17,8)
8	7.43	(188,7)	53.70 (28,0)
8	7.74	(196,6)	58.10 (30,3)

Performance Ratings vs. Temperature					
ASTM D 2992-B		73.4° F (23°) C	150° F (65.6°) C	180° F (82.2°) C	200° F (93.3°) C
11.4 Year Life, LTHS	psi	26,353	22,203	20,578	19,494
	MPa	(181,7)	(153,1)	(141,9)	(134,4)
20 Year Life, LTHS (long term hydrostatic stress)	psi	26,004	21,404	19,602	18,401
	MPa	(179,3)	(147,6)	(135,2)	(126,9)
20 Year Life, LCL (Lower Confidence Limit)	psi	24,596	20,335	18,666	17,554
	MPa	(169,6)	(140,2)	(128,7)	(121,0)
* 150° F and 180° F data are interpolated					

National Oilwell Varco has produced this brochure for general information only, and it is not intended for design purposes. Although every effort has been made to maintain the accuracy and reliability of its contents, National Oilwell Varco in no way assumes responsibility for liability for any loss, damage or injury resulting from the use of information and data herein nor is any warranty expressed or implied. Always cross-reference the bulletin date with the most current version listed at the web site noted in this literature.



15HR-0001
LICENSEE Q1 RATED



North America
17115 San Pedro Ave. Suite 200
San Antonio, Texas 78232 USA
Phone: 210 477 7500

South America
Acesso A Zona Industrial
Portuária de Suape, s/nº - Suape,
Ipojuca-PE-Brazil 55.590-000
Phone: 55 81 81312488

Europe
P.O. Box 6, 4190 CA
Geldermalsen, The Netherlands
Phone: 31 345 587 587

Asia Pacific
No. 7A, Tuas Avenue 3
Jurong, Singapore 639407
Phone: 65 6861 6118

Middle East
P.O. Box 17324
Dubai, UAE
Phone: 971 4881 3566

www.fgspipe.com • fgspipe@nov.com

NOV Fiber Glass Systems

© 2015 National Oilwell Varco
OG8100ENG April 2015