


## Hercules HP Single Pin Ram BOP

---

### Features

- Ram block is greaseable while in service
- Only requires 100 ft/lb to seal - operator can use crescent wrench or  $\frac{3}{8}$ -in. socket
- All steel conforms to NACE standards for sour service
- Test ports above and below rams
- Ram blocks greaseable while in service
- Only requires 100 ft/lb to seal – operator can use crescent wrench
- NACE compliant

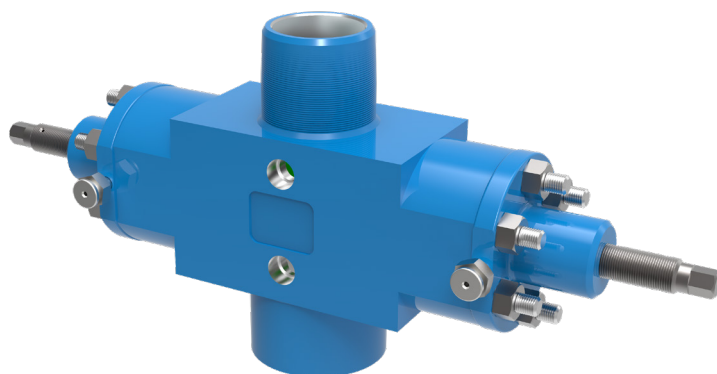

### Configurations

- Bottom connection =  $2\frac{7}{8}$ -in. EUE
- Top connection =  $2\frac{7}{8}$ -in. EUE
- Pressure rating: 5,000 psi
- Bore size: 2.56 in.
- Option: Big Bore single pin ram
- Top connection = various threaded connections pin or box
- Bottom connection = various threaded connections pin or box or various flange or stud sizes
- Pressure rating: 5,000 psi operating (7,500 psi test)