



# Tuboscope – TK™-Liner

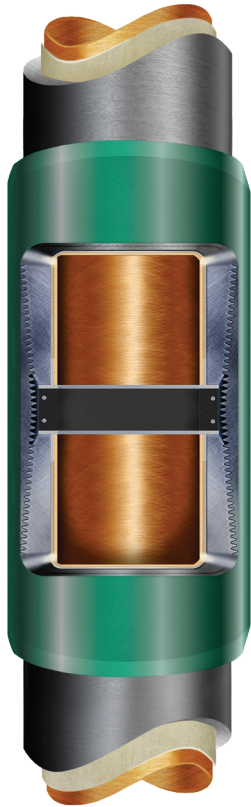


**TK™-Liner**  
For API Threaded Pipe

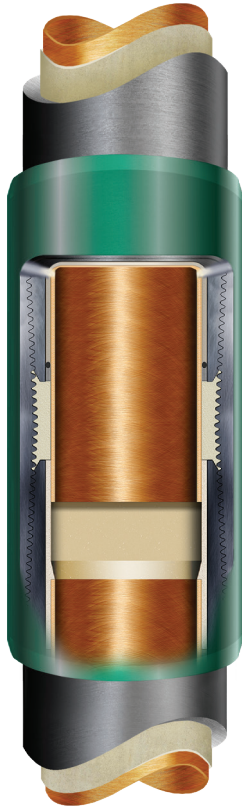


**TK™-Fiberline I**  
A ringless fiberglass lining system for API threads




**TK™-Fiberline II**  
An alternative version of fiberline for more severe well conditions

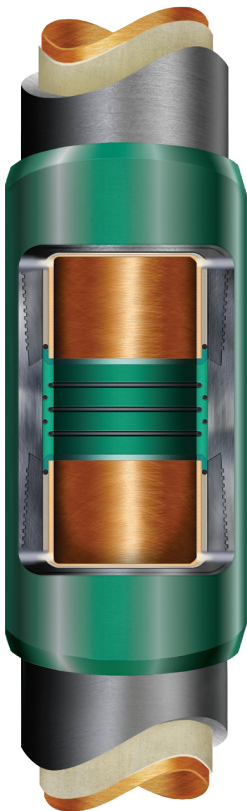


**TK™-Ring**  
For Premium Threaded Pipe

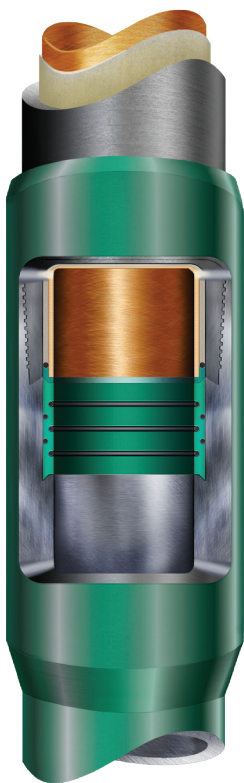

**TK™-Ring – Accessory Interface**

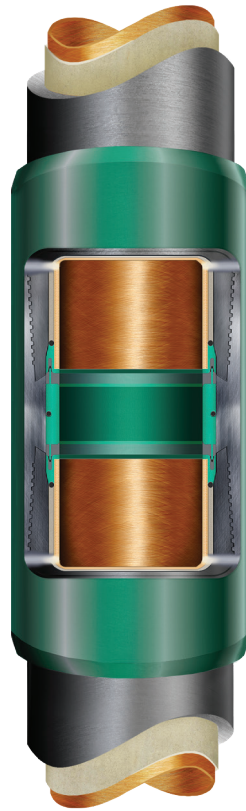

**TK™-Ring II – Coupled**

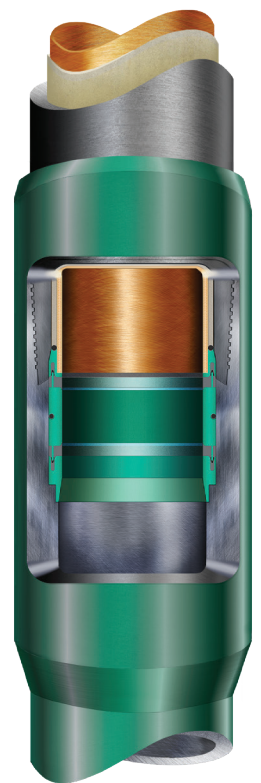

**TK™-Ring II – Accessory Interface**

## Tuboscope – TK™-Liner Plants

TK-Liner is a high-performance fiberglass-reinforced protective lining system suitable for production and injection wells, as well as disposal applications.

Ideal for maintaining production or injection in corrosive environments, this system is available for a variety of connection types.

**TK™-Liner** for API threaded pipe.

**TK™-Ring** for premium threaded pipe and fluid service.

**TK™-Ring II** for premium threaded pipe with enhanced protection in fluid and gas service.

**TK™-Fiberline** – a ringless fiberglass lining system for API threads.

**TK™-Fiberline II** – an alternate version of Fiberline for more severe well conditions.

### Plant Capabilities

TK™-Liner Plant	Maximum Length	Liner Sizes	Phone	Facility Manager
Abu Dhabi ICAD 2 Tuboscope DH DP	43'	2 ¾" – 9 ⅝"	+971 2 6575600	Maher Sarkis
Portlethen, Scotland	43'	2 ¾" – 9 ⅝"	01224 787741	Greig Morrison
Odessa, Texas – Fiberglass Liner	43'	2 ¾" – 9 ⅝"	432 362 0581	Joe Yates
Oman Liner and Tubo Wrap Plant	43'	2 ¾" – 9 ⅝"	+96 8 24484070	Randy Quinto
Singapore Tuboscope Gul Ave	32'	2 ¾" – 3 ½"	+65 6861 2688	Joe Haberer
	42'	4 ½" – 9 ⅝"		
Bogota, Colombia	43'	2 ¾" – 9 ⅝"	+57 16444510	Gilberto Cardenas
Macaé, Brazil	43'	2 ¾" – 9 ⅝"	+55 222 773 0600	Alexandre Rosa

Tubing & Casing	I.D.	Wall	Drift TK	Drift FL	Added Weight
2 ¾" 8RD EUE 4.7#	1.995"	.190"	1.647	1.600	0.70 lbs/ft
2 ⅞" 8RD EUE 6.5#	2.441"	.217"	2.087	2.019	0.90 lbs/ft
3 ½" 8RD EUE 9.3#	2.992"	.254"	2.627	2.559	0.75 lbs/ft
4 ½" 8RD EUE 12.75#	3.958"	.271"	3.577	3.577	1.5 lbs/ft
4 ½" 8RD EUE 12.60#	3.958"	.271"	3.577	3.577	1.4 lbs/ft
4 ½" 8RD EUE 11.60#	4.000"	.250"	3.577	3.577	1.5 lbs/ft
4 ½" 8RD EUE 11.60#	4.000"	.250"	3.577	3.577	1.5 lbs/ft
4 ½" 5TPI BTC 11.60#	4.000"	.250"	3.577	3.577	1.5 lbs/ft
5 ½" BTC 17#	4.892"	.304"	4.500	4.500	1.75 lbs/ft
7" 8RD LTC 23#	6.366"	.317"	5.934	5.934	3.5 lbs/ft
7" 5TPI BTC 26#	6.276"	.362"	5.725	5.725	7.8 lbs/ft
9 ⅝" 5TPI BTC 47#	8.681"	.472"	7.936	7.936	6.8 lbs/ft