

## Adjustable Sub

The NOV Adjustable Sub w/rotational lock is installed below a multi-string packer, allowing easier connection or space-out of the tubing between multiple-string packers and tailpipe. The rotational lock allows the sub to be locked in place at any desired length, up to 24 in., and prevents telescoping or rotational movement.

### Features


- Sub can be locked at any length up to 24 in
- Standard EU 8 RD connections, premium connections available upon request
- Lock prevents rotation and telescoping

### Benefits

- Adjustable sub facilitates tubing connections and spacing between multiple retrievable packers

### Applications

- Multiple string completions
- Retrievable-packer systems

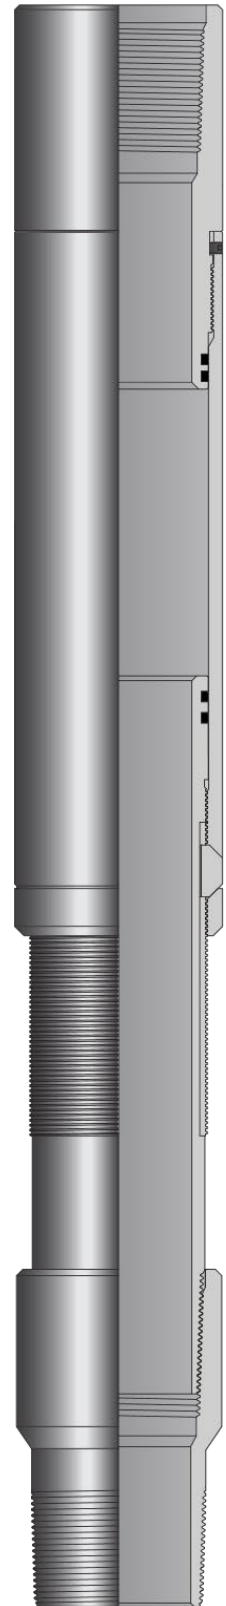

## Technical Data

Tubing Size in. (mm)	Max. O.D. in. (mm)	Min. I.D. in. (mm)	Thread Connection	Product Number
2.875 73,03	3.688 93,68	2.484 63,09	2.875" EU 8 RD	15-539-0250
3.500 88,90	4.500 114,30	2.992 76,00	3.500" EU 8 RD	15-539-0350