# **Ameron™** Victorian VII Pole

### Available in base plate and embedded styles.

The fluted Victorian VII pole features a turn of the century design reminiscent of the gaslight era, and complements historical and contemporary architecture.

Our Victorian Series lighting poles combine the charm of yesterday with the technology of today. Available in a variety of configurations, colors and finishes, the Victorian Series provides architects and designers with many creative options.

#### **Features and Benefits**

- Prestressed steel and highest quality concrete are centrifugally cast for ultimate strength and durability
- Natural stone and terrazzo aggregates maintain a like new appearance with virtually no maintenance
- Conforms to applicable sections of ACI, AASHTO, ASTM and IBC standards
- Exclusive 10-year warranty

#### **Colors and Finishes**

A wide range of standard, pre-formulated and custom colors are available. The concrete shafts are lightly blasted to expose the texture and color of the natural stone. See separate Aggregates and Finishes sheet for details. We offer Amershield<sup>™</sup>, a premium graffiti-resistant coating, as well as other durable sealers and protectants that further enhance colors, protect the concrete surface and aid in the removal of graffiti.

#### Durability with a classic touch.





For further information contact us at: 1.800.552.6376




## Ameron<sup>™</sup> Victorian VII Pole


51/8" Top OD

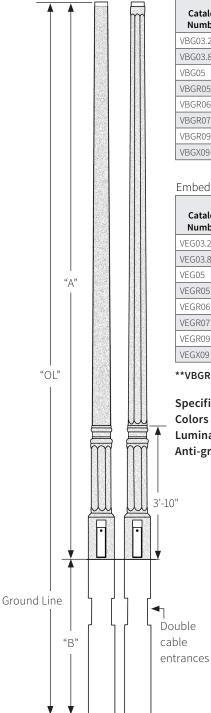





Base plate



Shaft cross section detail

For further information contact us at: 1.800.552.6376



Base plate style - information

Catalog Number	Pole Height "A"	Top OD	Base OD	Anchor Bolt	Bolt Circle	Base Plate (Sq)	Ultimate G.L. Moment (ft. lbs.)	Pole Weight (lbs.)
VBG03.2	10'-4"	51⁄8"	9"	<sup>3</sup> ⁄4" x 24" x 4"	11½"	11"	15,000	300
VBG03.8	12'-4"	51⁄8"	9"	<sup>3</sup> ⁄4" × 24" × 4"	11½"	11"	15,000	330
VBG05	16'-4"	51⁄8"	9"	<sup>3</sup> ⁄4" × 24" × 4"	11½"	11"	15,000	450
VBGR05**	16'-4"	51⁄8"	9"	<sup>3</sup> ⁄4" × 24" × 4"	11½"	11"	15,000	410
VBGR06**	19'-7"	51⁄8"	9"	1" x 36" x 4"	11½"	11"	15,000	650
VBGR07.5**	24'-7"	51/8"	9"	1" x 36" x 4"	11½"	11"	15,000	850
VBGR09**	29'-6"	51⁄8"	9"	1" x 36" x 4"	11½"	11"	15,000	1,050
VBGX09	29'-6"	51⁄8"	9"	1" x 36" x 4"	11½"	11"	15,000	1,100

Embedded style - information

Catalog Number	Pole Height "A"	Top OD	Base OD	Embedded Depth "B"	Overall Length "OL"	Ultimate G.L. Moment (ft. lbs.)	Pole Weight (lbs.)
VEG03.2	10'-4"	51⁄8"	9"	4'-6"	14'-10"	15,000	490
VEG03.8	12'-4"	51⁄8"	9"	4'-6"	16'-10"	15,000	520
VEG05	16'-4"	51/8"	9"	4'-6"	20'-10"	15,000	700
VEGR05**	16'-4"	51⁄8"	9"	4'-6"	20'-10"	15,000	650
VEGR06**	19'-7"	51/8"	9"	5'-3"	24'-10"	15,000	750
VEGR07.5**	24'-7"	51⁄8"	9"	5'-3"	29'-10"	15,000	1,000
VEGR09**	29'-6"	51/8"	9"	5'-3"	34'-9"	15,000	1,300
VEGX09	29'-6"	51/8"	9"	5'-3"	34'-9"	15,000	1,400

\*\*VBGR and VEGR Poles - upper shaft section is round tapered, not fluted.

Specifications: Use Centrecon Specifications

Colors and finishes: See Centrecon Series Color Selection guide

Luminaire mounting: See technical-mounting options section for more information.

Anti-graffiti and sealer: Optional coatings available for added protection

nov.com/poleproducts © 2017 National Oilwell Varco - All rights reserved - CMKT-1545\_ENG\_v002